

# TM Series

## Mid Size Snap-acting Switches



### Agency Approvals

Agency	Agency File Number
	E42363

### Specifications

<b>Contact Rating</b>	From low level <sup>1</sup> to 15 amps @ 250 V AC.
<b>Electrical Life</b>	150,000 cycles at 15 amps @ 250 V AC, models with 150 grams operating force. 350,000 cycles at 10 amps @ 250 V AC, models with 75 grams operating force
<b>Insulation Resistance</b>	1,000 M ohm min.
<b>Dielectric Strength</b>	1,000 Vrms min. @ sea level
<b>Operating Temperature</b>	-55°C to 150°C
<b>Operating Force</b>	50, 75 and 150 grams at actuator available; refer to chart for lever style forces.
<b>Mounting</b>	Torque screws 2-5 in/lbs

#### Notes:

1. Low Level=conditions where no arcing occurs during switching, i.e., 0.4 VA max. @ 20 V AC or DC max. Standard electrical life per UL 1054, rated for 6,000 operations.

### Description

The TM series mid size snap-acting switch is used in a variety of pumps and motors, consumer appliances and other white goods. The TM series gives designers a broad range of operating forces and a wide variety of actuator and terminal styles - making it a cost-effective solution for any innovative application.

### Features & Benefits

- Broad range of operating forces available
- Wide variety of actuator and terminal styles
- Cost-effective solution

### Applications

- Pumps and motors
- White goods
- Consumer appliances

### Materials

<b>Switch Housing</b>	Thermoplastic or general purpose phenolic (UL 94 V-0)
<b>Actuator Button</b>	Thermoplastic (UL 94 V-0)
<b>Spring</b>	Copper alloy
<b>Pivot</b>	Brass alloy
<b>Movable Contacts</b>	Gold alloy for ratings 1 amp @ 125 V AC or less. Fine silver for ratings greater than 1 amp @ 125 V AC.
<b>Stationary Contacts</b>	Gold alloy for ratings 1 amp or less. Fine silver for ratings greater than 1 amp.
<b>Terminals</b>	Brass alloy for ratings up to 10 amps @ 250 V AC. Copper alloy for 15 amps @ 250 V AC ratings.

#### Notes:

Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service center.


# TM Series

## Mid Size Snap-acting Switches



### Ordering Number


To order, simply select desired option from each category and place in the appropriate box. For additional options not shown in catalog, consult Customer Service Center. Available extended electrical life per UL 1054, rated for 100,000 operations, consult factory.

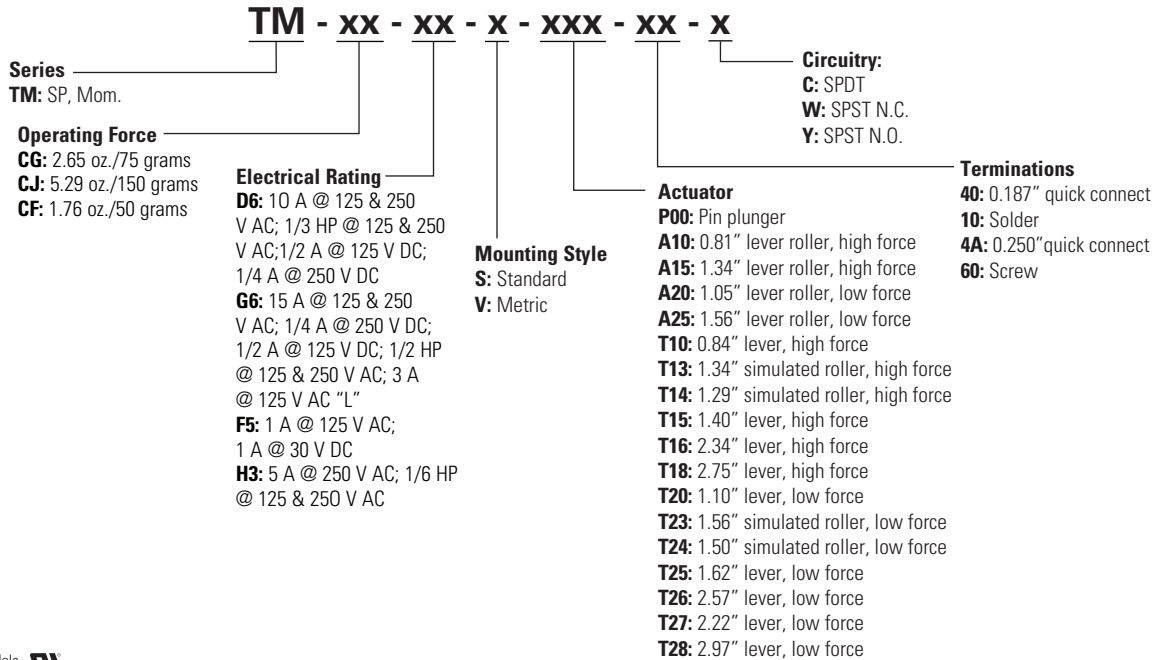

Notes: All models us

### TM Series

#### Mid Size Snap-Acting Switches - SP Momentary

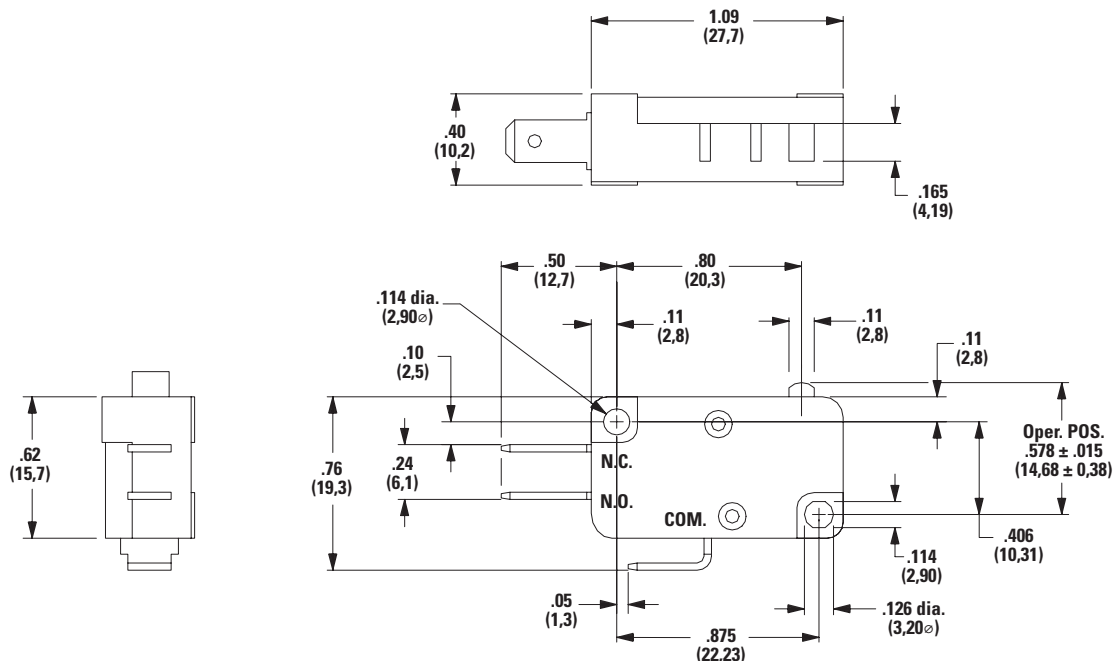

# TM Series

## Mid Size Snap-acting Switches



### Operating Force

Option Code	Basic Switch Operating Force (oz./grams)
CF	1.76 / 50
CG	2.65 / 75
CJ	5.29 / 150

**Notes:**  
Operating Force option 'CF' not available with 'T18, T27 and T28' actuator options. Operating force varies with actuator option, see actuator option section.

### Electrical Rating

Option Code	RoHS Compliant <sup>1</sup>	RoHS Compatible <sup>1</sup>	Contact Material		Electrical Rating
			Movable Contact	Stationary Contact	
D6	Yes		Fine Silver	Fine Silver	10 AMPS @ 125 & 250 V AC; 1/3 HP @ 125 & 250 V AC; 1/2 AMP @125 V DC; 1/4 AMP @ 250 V DC.
F5	Yes		Gold alloy	Gold alloy	From low level <sup>1</sup> to 1 AMP @ 125 V AC, 1 AMP @ 30 V DC.
G6	Yes		Fine Silver	Fine Silver	15 AMPS @ 125 & 250 V AC; 0.25 AMP @ 250 V DC; 0.5 AMP @125 V DC; 1/2 HP @ 125 & 250 V AC; 3 AMPS @ 125 V AC "L".
H3	Yes		Fine Silver	Fine Silver	5 AMPS @ 250 V AC; 1/6 HP @ 125 & 250 V AC.



**Notes:** See Technical Data section of this catalog for RoHS compliant and compatible definition and specifications. All models Consult Customer Service center for availability and delivery of nonstandard ratings.  
1. Low Level=conditions where no arcing occurs during switching, i.e., 0.4 VA max. @ 20 V AC or DC max.

### Available Combinations

Electrical Rating	Max. Operating Force (oz./grams)		
	1.76/50 CF	2.65/75 CG	5.29/150 CJ
D6	•	•	•
F5	•	•	•
G6	X	X	•
H3	•	•	•

**Notes:** • Available, X Not available, All models   
Consult Customer Service center for availability and delivery of nonstandard ratings.  
1. Low Level=conditions where no arcing occurs during switching, i.e., 0.4 VA max. @ 20 V AC or DC max.

### Mounting Style inches (mm)

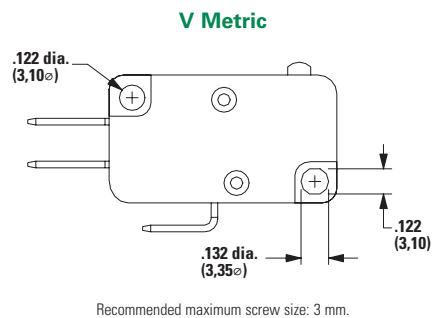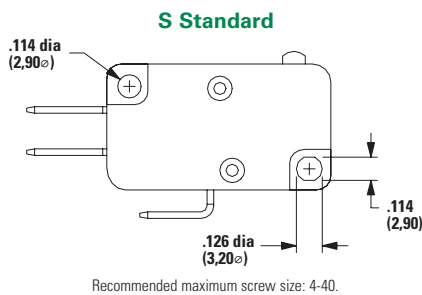

**Notes:**  
Torque mounting screws 2-5 in/lbs.

# TM Series

## Mid Size Snap-acting Switches



### Actuator

Option Code	Fig.	Dim. A	Dim. B	Dim. C	Dim. D
P00	2	0.80 (20.3)	-	0.578 ± 0.015 (14.68 ± 0.38)	-
A10	1	0.81 (20.6)	0.36 (9.1)	0.810 ± 0.020 (20.57 ± 0.51)	0.19 dia. (4.8Ø)
A15	1	1.34 (34.0)	0.36 (9.1)	0.810 ± 0.040 (20.57 ± 1.02)	0.19 dia. (4.8Ø)
A20	1	1.03 (26.2)	0.58 (14.7)	0.810 ± 0.050 (20.57 ± 1.27)	0.19 dia. (4.8Ø)
A25	1	1.56 (39.6)	0.58 (14.7)	0.810 ± 0.080 (20.57 ± 2.03)	0.19 dia. (4.8Ø)
T10	3	0.84 (21.3)	0.36 (9.1)	0.600 ± 0.020 (15.24 ± 0.51)	-
T13	4	1.34 (34.0)	0.36 (9.1)	0.810 ± 0.040 (20.57 ± 1.02)	0.19 dia. (4.8Ø)
T14	4	1.28 (32.5)	0.36 (9.1)	0.743 ± 0.050 (18.9 ± 1.3)	0.236 dia. (6.0Ø)
T15	3	1.40 (35.6)	0.36 (9.1)	0.600 ± 0.040 (15.24 ± 1.02)	-
T16	3	2.34 (59.4)	0.36 (9.1)	0.600 ± 0.062 (15.24 ± 1.57)	-
T17	3	2.00 (50.8)	0.36 (9.1)	0.600 ± 0.052 (15.24 ± 1.57)	-
T18	3	2.75 (69.9)	0.36 (9.1)	0.600 ± 0.093 (15.24 ± 2.36)	-
T20	3	1.06 (26.9)	0.58 (14.7)	0.600 ± 0.045 (15.24 ± 1.14)	-
T23	4	1.56 (39.6)	0.58 (14.7)	0.810 ± 0.065 (20.57 ± 1.65)	0.19 dia. (4.8Ø)
T24	4	1.50 (38.1)	0.58 (14.7)	0.743 ± 0.090 (18.80 ± 2.29)	0.236 dia. (6.0Ø)
T25	3	1.62 (41.1)	0.58 (14.7)	0.600 ± 0.080 (15.24 ± 2.03)	-
T26	3	2.56 (65.0)	0.58 (14.7)	0.600 ± 0.125 (15.24 ± 3.18)	-
T27	3	2.22 (56.4)	0.58 (14.7)	0.600 ± 0.125 (15.24 ± 3.18)	-
T28	3	2.97 (75.4)	0.58 (14.7)	0.600 ± 0.187 (15.24 ± 4.75)	-

Note: Switch characteristics chart on following page.

Figure 1, Lever Roller




Figure 2, Pin Roller

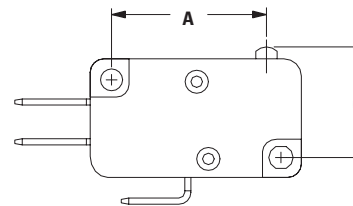


Figure 3, Lever







Figure 4, Simulated Roller

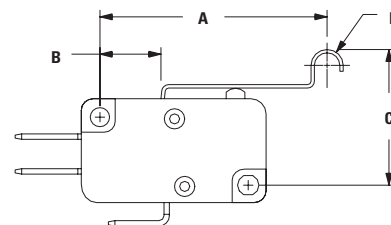

### High Force, Low Motion Pivot Position

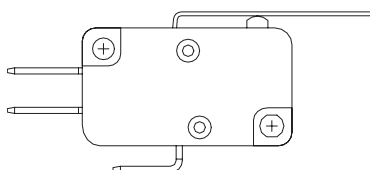

### Low Force, High Motion Pivot Position

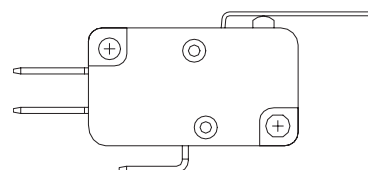

Available with actuators A10, A15, T10, T13, T14, T15, T16, T17 and T18.

Available with actuators A20, A25, T20, T23, T24, T25, T26, T27 and T28.

Note: Lever actuator options are available in either of two pivot positions. Levers located in the forward pivot position have lower forces and higher motions. Levers located in the rear pivot position have higher forces and lower motions.

# TM Series

## Mid Size Snap-acting Switches



### Switch Characteristics

Option Code	Max. Operating Force (oz./grams)			Min. Release Force (oz./grams)			Min Return Force (oz./grams)			Max. Differential Travel	Max. Pre-Travel	Min. Over Travel
	CF (50)	CG (75)	CJ (150)	CF (50)	CG (75)	CJ (150)	CF (50)	CG (75)	CJ (150)			
T10	2.12 60	3.17 90	6.35 180	0.49 14	0.99 28	1.69 48	0.25 7	0.53 15	1.06 30	0.013 (0.33)	0.080 (2.03)	0.035 (0.89)
T13	1.06 30	1.59 45	2.82 80	0.21 6	0.35 10	0.71 20	0.11 3	0.14 4	0.35 10	0.030 (0.76)	0.160 (4.06)	0.065 (1.65)
T13	1.06 30	1.76 50	3.17 90	0.25 7	0.35 10	0.71 20	0.11 3	0.14 4	0.35 10	0.050 (1.27)	0.140 (3.56)	0.062 (1.57)
T15	1.06 30	1.59 45	2.28 80	0.21 6	0.32 9	0.71 20	0.11 3	0.14 4	0.35 10	0.032 (0.81)	0.160 (4.06)	0.075 (1.90)
T16	0.53 15	0.71 20	1.41 40	0.11 3	0.18 5	0.35 10	0.05 1.5	0.07 2	0.18 5	0.090 (2.29)	0.312 (7.92)	0.140 (3.56)
T17	0.71 20	0.88 25	1.76 50	0.14 4	0.21 6	0.42 12	0.07 2	0.07 2	0.21 6	0.062 (1.57)	0.220 (5.59)	0.110 (2.79)
T18	-	0.71 20	1.23 35	-	0.14 4	0.28 8	-	0.04 1	0.14 4	0.078 (1.98)	0.375 (9.52)	0.160 (4.06)
T20	1.06 30	1.59 45	3.17 90	0.21 6	0.32 9	0.71 20	0.11 3	0.18 5	0.35 10	0.030 (0.76)	0.160 (4.06)	0.065 (1.65)
T23	0.53 15	1.06 30	1.59 45	0.11 3	0.18 5	0.35 10	0.04 1	0.07 2	0.18 5	0.070 (1.78)	0.312 (7.92)	0.125 (3.18)
T24	0.53 15	1.23 35	1.76 50	0.11 3	0.18 5	0.35 10	0.05 1.5	0.07 2	0.18 5	0.080 (2.03)	0.312 (7.92)	0.110 (2.79)
T25	0.71 20	1.06 30	1.41 40	0.07 2	0.14 4	0.32 9	0.04 1	0.07 2	0.16 4.5	0.070 (1.78)	0.330 (8.38)	0.100 (2.54)
T26	-	0.35 10	0.71 20	-	0.07 2	0.18 5	-	0.04 1	0.07 2	0.110 (2.79)	0.500 (12.7)	0.250 (6.35)
T27	-	0.60 17	0.88 25	-	0.11 3	0.21 6	-	0.04 1	0.11 3	0.125 (3.18)	0.500 (12.70)	0.200 (5.08)
T28	-	0.42 12	0.63 18	-	0.07 2	0.14 4	-	0.04 1	0.07 2	0.187 (4.75)	0.750 (19.05)	0.280 (7.11)
A10	2.12 60	3.17 90	6.35 180	0.49 14	0.99 28	1.69 48	0.25 7	0.53 15	1.06 30	0.013 (0.33)	0.070 (1.78)	0.035 (0.89)
A15	1.06 30	1.59 45	2.82 80	0.21 6	0.35 10	0.71 20	0.11 3	0.14 4	0.35 10	0.030 (0.76)	0.160 (4.06)	0.065 (1.65)
A20	1.06 30	1.76 50	3.17 90	0.25 7	0.35 10	0.71 20	0.11 3	0.18 5	0.35 10	0.025 (0.64)	0.140 (3.56)	0.060 (1.52)
A25	0.53 15	1.06 30	1.59 45	0.11 3	0.18 5	0.35 10	0.04 1	0.07 2	0.18 5	0.070 (1.78)	0.312 (7.92)	0.125 (3.18)
P00	1.76 50	2.65 75	5.29 150	0.71 20	0.99 28	2.12 60	0.35 10	0.53 15	1.06 30	0.013 (0.33)	0.056 (1.42)	0.035 (0.89)

Note: For basic switch operating forces, see page 1


# TM Series

## Mid Size Snap-acting Switches




### Terminations inches (mm)

#### 40 0.187" Quick Connect

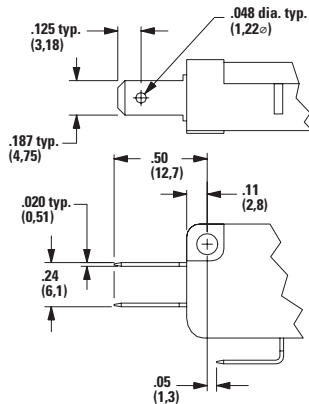


#### 60 Screw Terminals

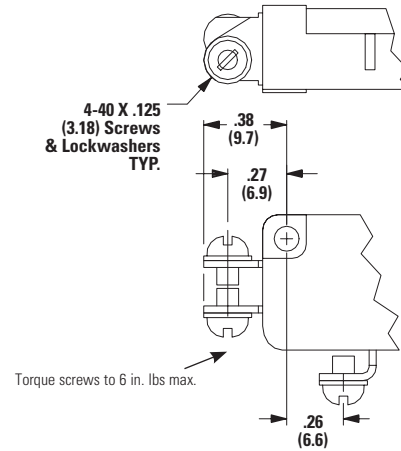


Not available with 'F5' rating option.

#### 10 Solder

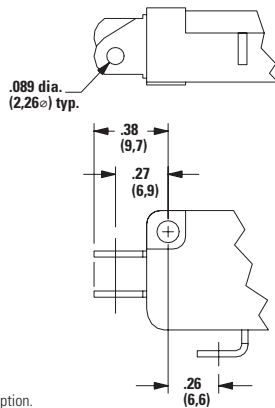

Not available with 'F5' rating option.

#### 4A 0.250" Quick Connect

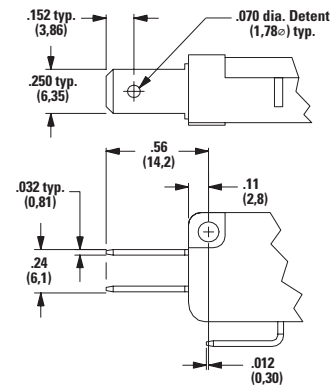

Not available with 'F5' rating option.

### Circuitry

- C** SPDT (Single Pole, Double Throw)
- W** SPST N.C. (Single Pole, Single Throw Normally Closed)
- Y** SPST N.O. (Single Pole, Single Throw Normally Open)

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.