

# KXT3 Series

## Ultra Low Profile Top Actuated



### Specifications

<b>Function</b>	Momentary action
<b>Contact Arrangement</b>	1 make contact = SPST, N.O.
<b>Terminals</b>	G type for SMT
<b>Travel</b>	0.13 mm ± 0.05 mm
<b>Packaging</b>	In reels of 8,500 pieces Dimensions of reels according to EIA 481B External diameter 330 mm

### Electrical Characteristics

<b>Maximum Voltage</b>	15 VDC
<b>Maximum Current DC</b>	20 mA
<b>Dielectric Strength</b>	(50/60 Hz, 1 min) 250 Vrms
<b>Contact Resistance</b>	≤ 500 mΩ
<b>Insulation Resistance</b>	≥ 50 MΩ
<b>Bounce Time</b>	≤ 10 ms

### Environmental Characteristics

<b>Operating Temperature</b>	-40°C to 85°C
<b>Storage Temperature</b>	-40°C to 85°C

### Process

<b>Soldering</b>	This component is suited to the following methods: Infrared Reflow Soldering in accordance with IEC61760-1
------------------	---

### Description

The KXT3 series ultra-low profile top actuated tactile is a reliable and long-lasting switch built to meet the specific needs of engineers creating the next generation of devices, including in-ear headphones and earbuds, wearable electronics and hearing aids. The switch has a 3.0 x 2.0 mm footprint, 0.6 mm thickness and high number of cycles.


### Features & Benefits

- Small footprint 3.0 x 2.0 mm
- 0.6 mm thickness
- High number of cycle

### Applications

- Wearable electronics
- In-Ear headphones, Earbuds
- Mobile Phones
- Portable Electronics
- Hearing Aids


### Dimensions (mm)

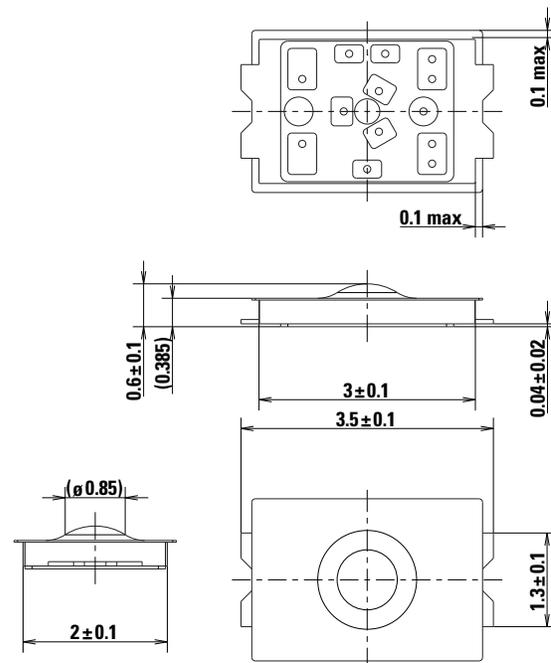

### Schematic



### Recommended PCB Layout

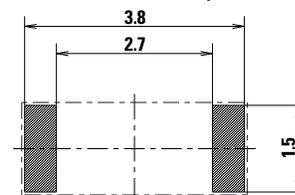

# KXT3 Series


## Ultra Low Profile Top Actuated



### Mechanical Characteristics


Part #	Operating Force gf	Operating Life	Casing Color
KXT 311 LHS	100 ± 50	300,000	Black
KXT 321 LHS	160 ± 50	500,000	Black
KXT 331 LHS	240 ± 70	500,000	Black
KXT 341 LHS	330 ± 70	300,000	Black

### Tape & Reel

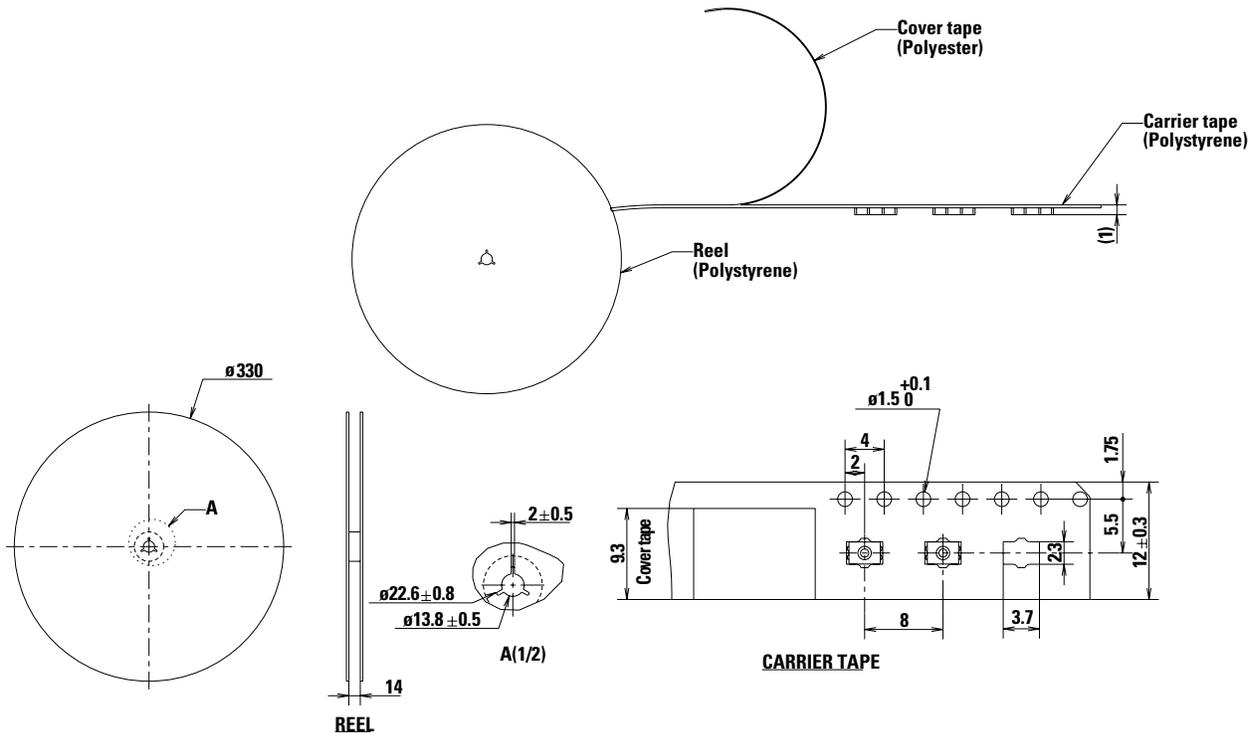

### Ordering Number

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box. For any part number different from those listed above, please consult your local representative.

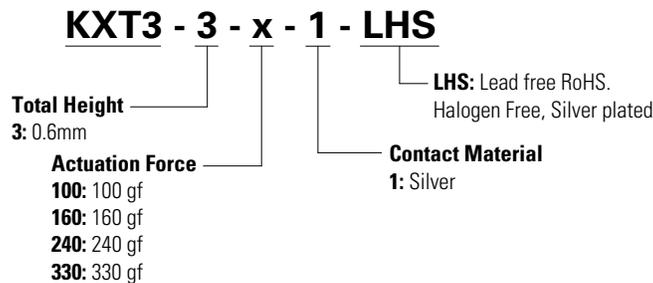

### Liability Limitation

This datasheet does not provide enough information for applications that require a certain level of quality or safety such as automotive, medical systems, or safety equipment. Please contact customer service for the contractual specification package.

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.