



C&K Components is a leader in interface and switch technology as well as smart card and high reliability connector products. C&K prides itself with its ability to turn customer needs into solutions by supplying the highest level of quality products that meet the diverse needs of original equipment manufacturers across a broad spectrum of industries. C&K is committed to advancing innovation into customer solutions through its investment in state of the art technology centers and reliable manufacturing on a global basis.

## Products



C&K offers more than 40,000 unique part numbers that are built, priced and delivered as standard catalog items, including tactile, navigation, detect, toggle, rocker, pushbutton, rotary, key, slide, DIP, thumbwheel and illuminated switch products, along with smart card and high-reliability connectors. C&K focuses on improving product performance and reliability through design, material selection, quality and state-of-the art production, and test facilities in Europe, North America and Asia.

## Expertise

C&K serves more than 20,000 companies and distributors worldwide, so its sales and engineering teams are experienced in specifying and designing switches to fit a wide array of applications. C&K partners with all of the leading manufacturers of telecommunication equipment, computer and peripherals, handset devices and mobile communications, consumer, industrial and appliance products, instrumentation and test equipment, off-road and automotive products.

## Design

When standard product does not meet a customer's exact design requirement, C&K responds quickly with customer service, design engineering and technical support personnel to help implement the right solution. C&K will adapt existing technology to meet a project's specific design and performance parameters, or building a custom component to one customer's specifications.

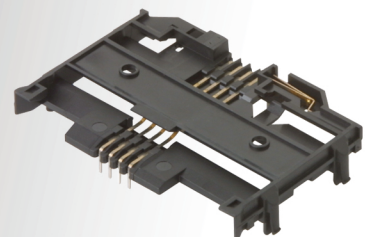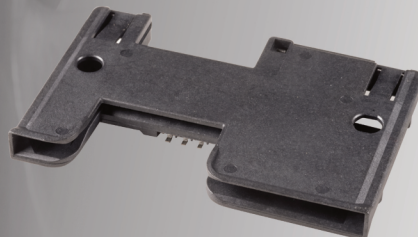



# gy into Solutions

## Service

C&K has built its reputation as a customer-focused organization, providing superior support, flexibility and solutions at competitive prices. Whether it's a standard, special or custom product, the company will deliver a cost-effective component for all application-specific requirements. C&K is committed to providing the best products backed by the most responsive and efficient service in the industry.


## Worldwide

C&K maintains a global footprint that delivers on-the-ground support to its customers no matter where they are located. Manufacturing facilities are located in Europe, Asia and the Americas, and a worldwide network of sales representatives and stocking distributors ensures local support and product availability.

## Quality


C&K's global design centers and in-house testing facilities provide the manufacturing flexibility of scaling production from prototype design through volume production. Coupled with world-class machining, precision high speed stamping, plastic and rubber molding, surface plating and overmolding, the company also offers a wide range of value-added solutions, from wire leads and harnesses to complete front panel assemblies.

C&K is focused on delivering total customer satisfaction with superior products, processes and services by offering leading edge component technology and a company-wide commitment to total customer satisfaction.

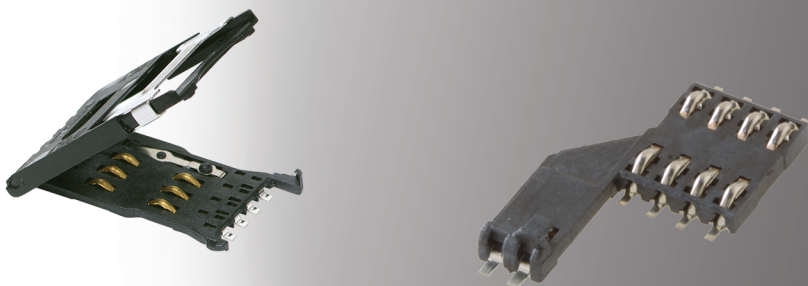


# Design Features of C&K Smart Card Connectors

C&K Components has a successful track record of manufacturing innovative interconnect devices with a strong emphasis on reliability and flexibility. As a long established supplier of such devices for Smart Cards in a wide range of applications, we have extensive experience matching performance with the need to remain cost sensitive. We consider the true cost of the interconnect to be a function not just of price, but also the ease with which the device can be integrated into the customer's production process and its performance in the field. We have built in a number of features which set our products apart, such as:




## Inlay contact finish

A means of applying precious metal to the contact area utilizing pressure as opposed to conventional plating. We have found this to be the most durable finish available without compromising the electrical performance of the contact. Our research has shown that our inlay finish lasts over ten times as long as standard gold plating. Where we state the life of the precious metal this is intended to be the "worst case" scenario, because the test has been made using the most abrasive smart card that we can find on the market (given that the equipment maker can rarely control which smart cards are used). Note that the inlay finish is silver in color, being an alloy of gold, silver, and palladium.




## Card detection switches

As a manufacturer of switches as well as interconnects, we have been able to integrate high performance dome switches into many of our devices. These are variants of switch products which are already in high volume production as stand alone components.



## Mechanical robustness

Four metal pegs, to be soldered in PCB metalized holes at the same time than the SMT terminals, have been designed on the smart card connectors in order to increase the resistance of the connector to card insertion force. This participates to the life time and to the overload resistance.



## Contact design

The geometry of the contact has an important bearing on its electrical performance. Our contacts are designed to give an efficient wiping action and to maximize the stress between contact and card, thus minimizing the contact resistance. The "spooned" contact area is also shaped so as to protect it from damage during card insertion.



## PCI (security standard for POS applications)

Two levels of PCI compatibility level are available:

### PCI ready:

Specific features are designed in the connector in order to ease the integration of security devices around and below the connector.





### PCI:

Additional accessories are integrated on the connector in order to avoid access to the data contacts and to detect any connection attempt.


## Materials

The contact material has been chosen because of its resistance to atmospheric pollution, solderability and performance over time in giving a consistent normal force. Since all of our new interconnects are designed for surface mounting, the plastic materials used must withstand high temperature soldering processes without deforming or adversely affecting performance.

## FULL SIZE CARD CONNECTORS

				
<b>Series</b>	<b>CCM01</b>	<b>CCM02</b>	<b>CCM04</b>	
<b>Applications</b>	Professional	Professional	Consumer/Professional	
<b>PCI*</b>	PCI ready	PCI/PCI ready		
<b>EMV</b>	•	•		
<b>Insertion force</b>	40N max	40N max	10N max	
<b>Overload</b>	250N	180N	40N	
<b>Card guide</b>	•	•		
<b>Sealed switch</b>	•	•		
<b>Operating life</b>	100,000 cycles	500,000 cycles	>50,000 cycles	
<b>Contact plating</b>	inlay	inlay	gold	
<b>Number of contacts</b>	8	8	6 or 8	
<b>Contact type</b>	friction	friction	friction/vandal proof	
<b>Page No.</b>	7	12	17	

## SIM / SAM CARD CONNECTORS

			
<b>Series</b>	<b>CCM03</b>	<b>CCM04</b>	
<b>Applications</b>	Consumer/Professional	Consumer/Professional	
<b>Cover</b>	hinged / fixed	hinged / fixed	
<b>Operating life</b>	10,000 to 50,000 cycles	30,000 cycles	
<b>Sealed switch</b>	•		
<b>Contact plating</b>	inlay / gold	inlay / gold	
<b>Card end travel switch</b>	with / without	without	
<b>Number of contacts</b>	6 or 8	6 or 8	
<b>Page No.</b>	24	43	

\* PCI

**PCI ready:** specific features are designed into the connector in order to ease the integration of security devices around and below the connector.

**PCI:** specific additional accessories are integrated on the connector in order to avoid access to the data contacts and to detect any connection attempt.




The logo for C&K, featuring the letters 'C' and 'K' in a bold, red, italicized font, with an ampersand '&' in a smaller, black, bold font between them. A registered trademark symbol (®) is located at the top right of the 'K'.

**C&K**®

A red horizontal bar containing the text 'Full Size Cards' in a white, bold, sans-serif font.

**Full Size Cards**

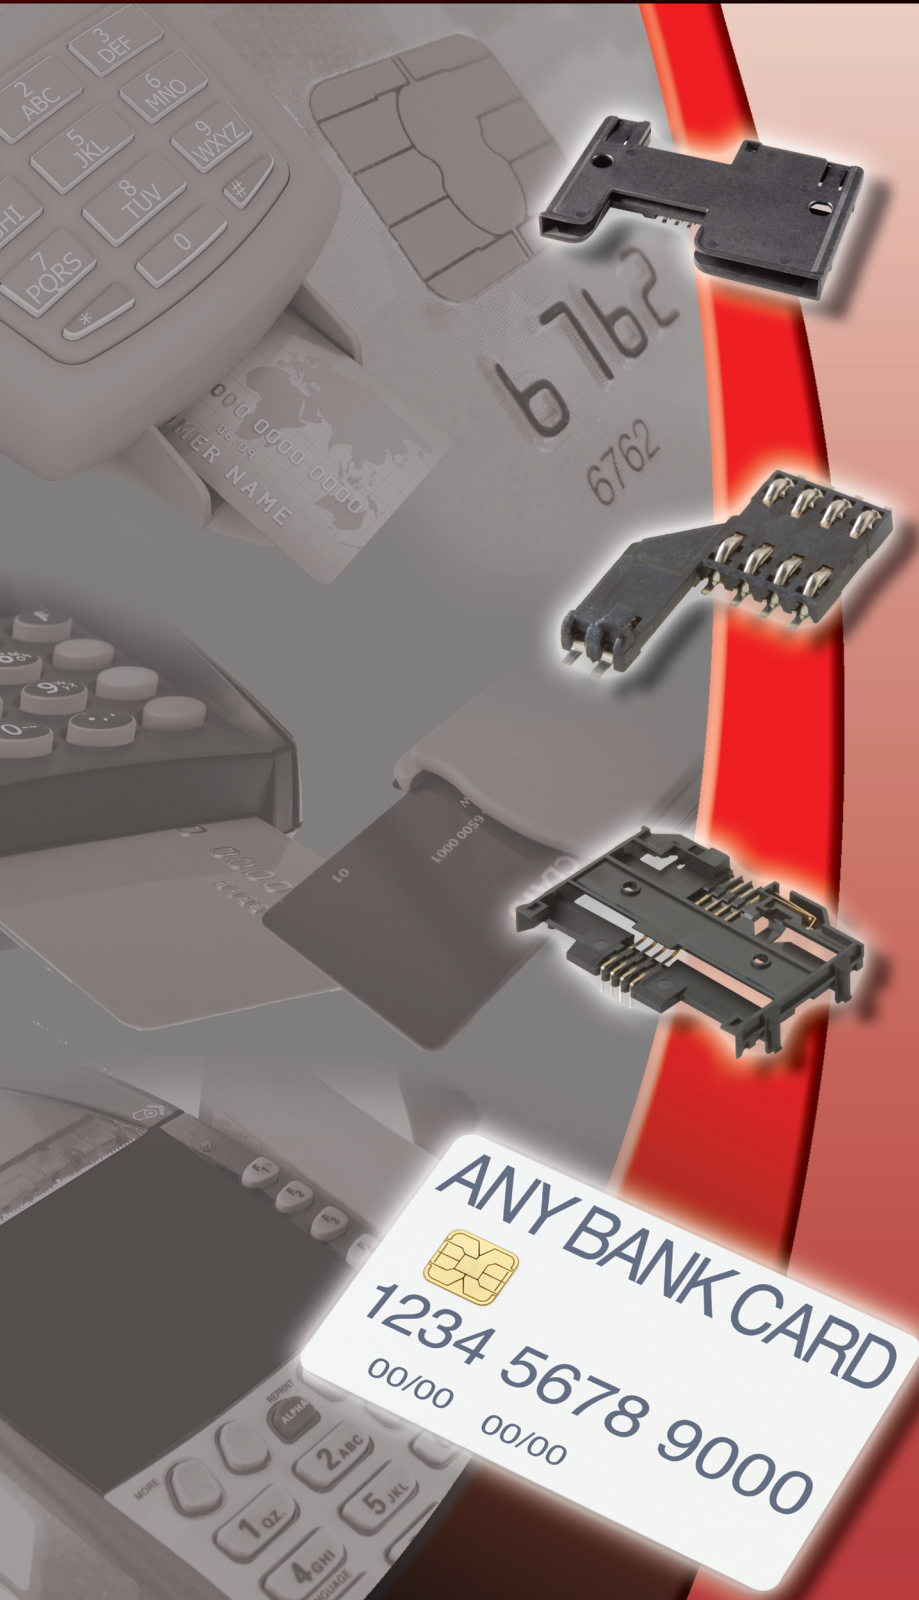

## Features

- Operating life up to 100,000 cycles
- 40N card insertion force
- EMV
- PCI ready
- Card detection sealed switch

## Typical Applications

- Transaction
- Identification
- POS



## Mechanical

Number of Contacts	8
Mechanical life	Up to 500,000 cycles
Card insertion force	40N max.
Card extraction force	1 N min / 10 N max
Contact force	0,2N / 0,50 N max
Card detection switch	0,8 N max for actuation (end travel switch actuation force actuates when card is 0,9mm from card stop)
	1,8 N max for complete depression
Vibration Frequency	10 to 500 Hz. Acceleration 50m/s <sup>2</sup> Duration 6 hours - amplitude 0,35mm
Max elect. discontinuity	1µs
Shock	Peak value 500 m/s <sup>2</sup> – Duration 11 ms 3 shocks in each direction of each axis

## Packaging

Tray 30 parts / Cartons 300 parts  
Reel 200 parts / Cartons 1,000 parts

## Soldering

Compatible with lead free SMT reflow soldering process

## Contact Electrical Data

Insulation resistance	1,000 MΩ min
Resistance	100 mΩ max
Current rating	10 µA min / 1 A max
Dielectric strength	750 Vrms min

## Switch Electrical Data

Card detection switch	Normally open
Contact resistance	100 mΩ max
Dielectric strength	250 Vrms min
Current rating	1 mA min / 10 mA max
Maximum power	0.2 VA

## Environmental Data







Operating temperature	-40°C to +85°C
Damp heat	IEC 512 test number 11c (10 days)
Salt mist	IEC 512 test number 11f (96 hours)
Card detection switch	Sealed against dust
RoHS compliant	

Designation	Termination	Operating Life	Card Insertion Force
CCM01-2027LFT	SMT	100,000 cycles	40N

# CCM01 MK2 Series

CCM01-2027 LFT

Full Size

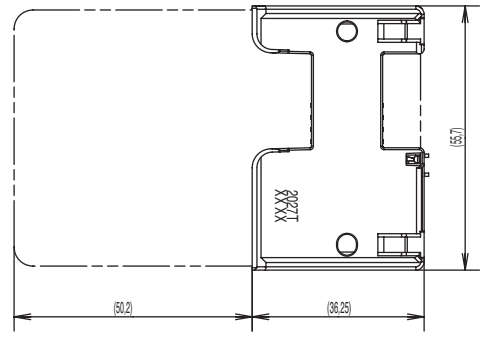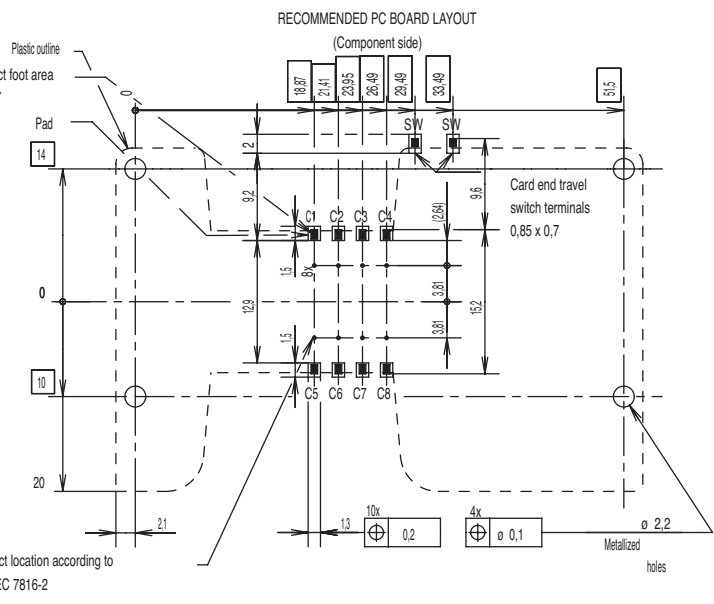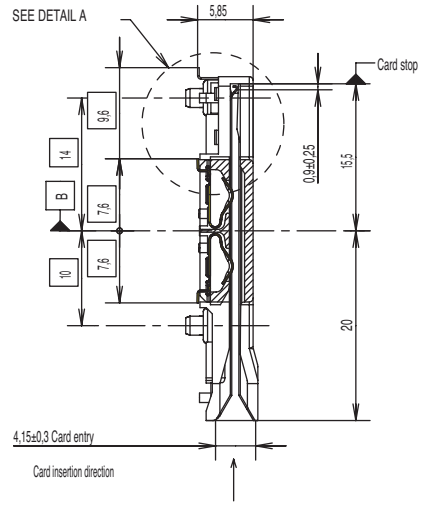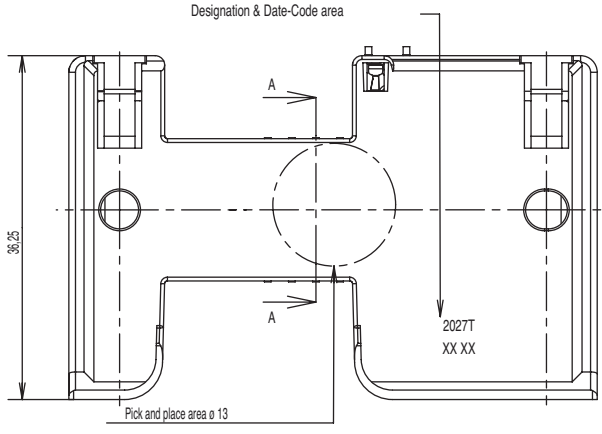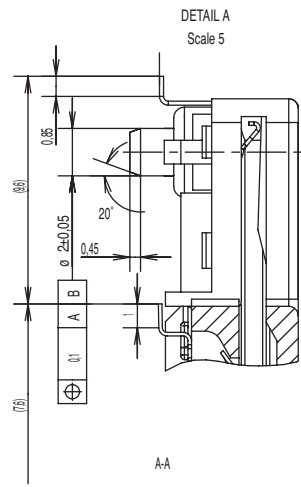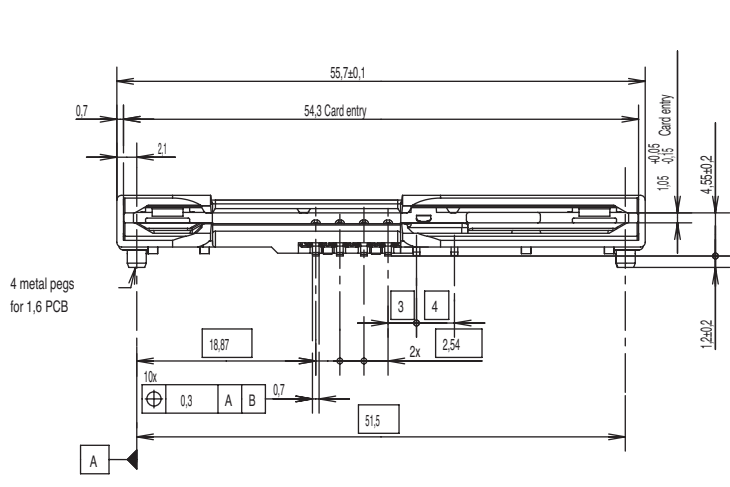

Dimensions are shown in mm  
Specifications and dimensions subject to change

www.ckswitches.com



## Features

- **Operating life up to 600,000 cycles**
- **40N card insertion force**
- **EMV**
- **Card detection sealed switch**

## Typical Applications

- **Transaction**
- **Identification**
- **POS**



## Mechanical

Number of Contacts	8
Mechanical life	Up to 500,000 cycles
Card insertion force	40N max.
Card extraction force	1 N min / 10 N max
Contact force	0,2N / 0,60 N max
Card detection switch	0,8 N max for actuation (end travel switch actuation force actuates when card is 0,9mm from card stop)
	1,8 N max for complete depression
Vibration Frequency	10 to 500 Hz. Acceleration 50m/s <sup>2</sup> Duration 6 hours - amplitude 0,35mm
Max elect. discontinuity	1µs
Shock	Peak value 500 m/s <sup>2</sup> – Duration 11 ms 3 shocks in each direction of each axis

## Packaging

Tray 25 parts / Cartons 300 parts

## Soldering

Compatible with lead free SMT reflow soldering process  
According to JEC61766-1:2006

## Contact Electrical Data

Insulation resistance	1,000 MΩ min
Resistance	100 mΩ max
Current rating	<10 mA
Dielectric strength	750 Vrms min

## Switch Electrical Data

Card detection switch	Normally open
Contact resistance	100 mΩ max
Dielectric strength	250 Vrms min
Current rating	50 µA min / 10 mA max
Maximum power	0.2 VA

## Environmental Data






Operating temperature	-40°C to +85°C
Card detection switch	IP50
RoHS compliant	

Designation	Termination	Operating Life	Card Insertion Force
CCM01-2327LFT	SMT	600,000 cycles	40N

# CCM01 MK4 Series

CCM01-2327 LFT

Full Size

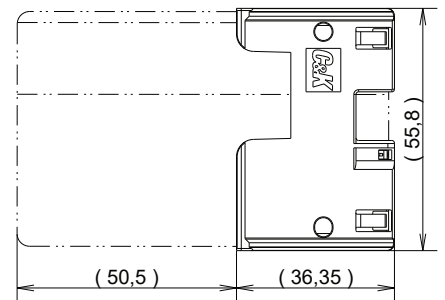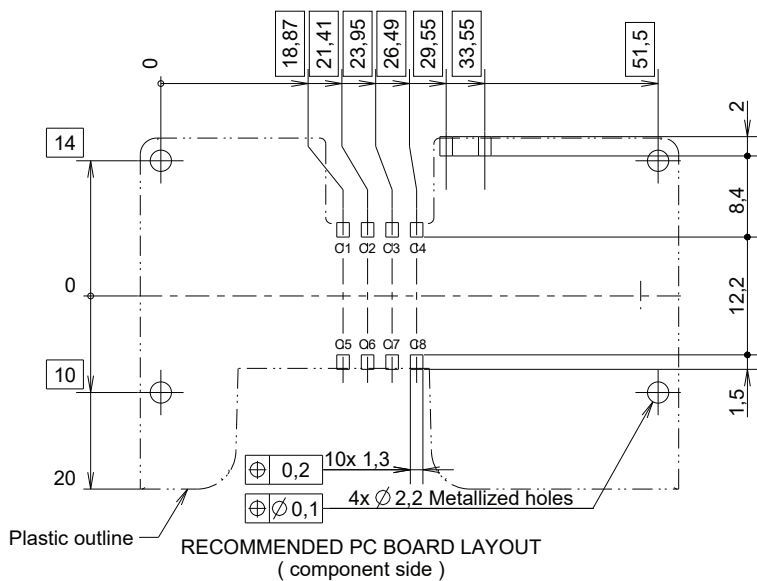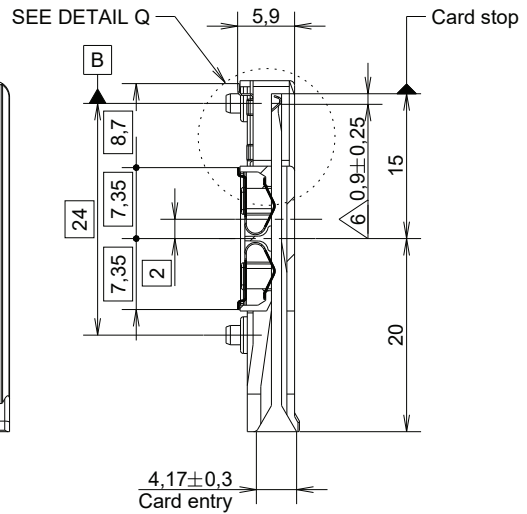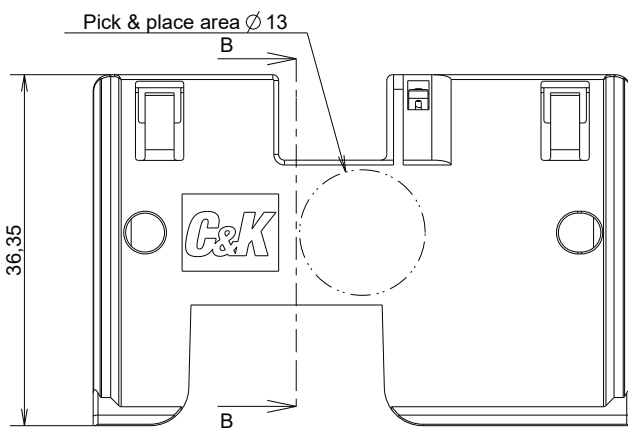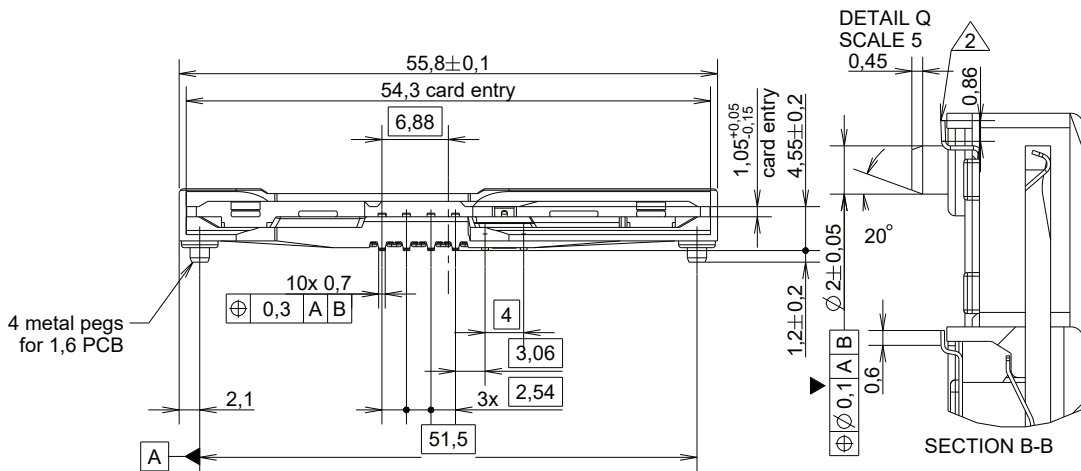

## Features/Benefits

- Operating life 500,000 cycles
- Low profile 4 mm and 3.2 mm height
- Card detection sealed switch

## Typical Applications

- Transaction
- Identification
- POS
- MPOS



Full Size

## Mechanical

NUMBER OF CONTACTS:	8
MECHANICAL LIFE:	500,000 cycles
CARD INSERTION FORCE:	10 N max.
CARD EXTRACTION FORCE:	1 N min. / 10 N max.
CONTACT FORCE:	0,2 N / 0,60 N max.

## Packaging

Tray 25 parts or Reel 350 parts

## Soldering

Compatible with lead free SMT reflow soldering process

## Contact Electrical Data

INSULATION RESISTANCE:	1,000 M $\Omega$ min.
CONTACT RESISTANCE:	100 m $\Omega$ max.
CURRENT RATING:	10 $\mu$ A min. / 1A max.
DIELECTRIC STRENGTH:	750 Vrms min.

## Switch Electrical Data


CARD DETECTION SWITCH:	Normally open
CONTACT RESISTANCE:	100 m $\Omega$ max.
DIELECTRIC STRENGTH:	250 Vrms min.
CURRENT RATING:	1 mA min. / 10 mA max.
MAXIMUM POWER:	0.2 VA

## Environmental Data

OPERATING TEMPERATURE:	-40°C to + 85°C
CARD DETECTION SWITCH:	Sealed against dust
RoHS compliant	

## How To Order


To order, simply select desired option from each category and place in the appropriate box. For additional options not shown in catalog, consult our Customer Service Center.

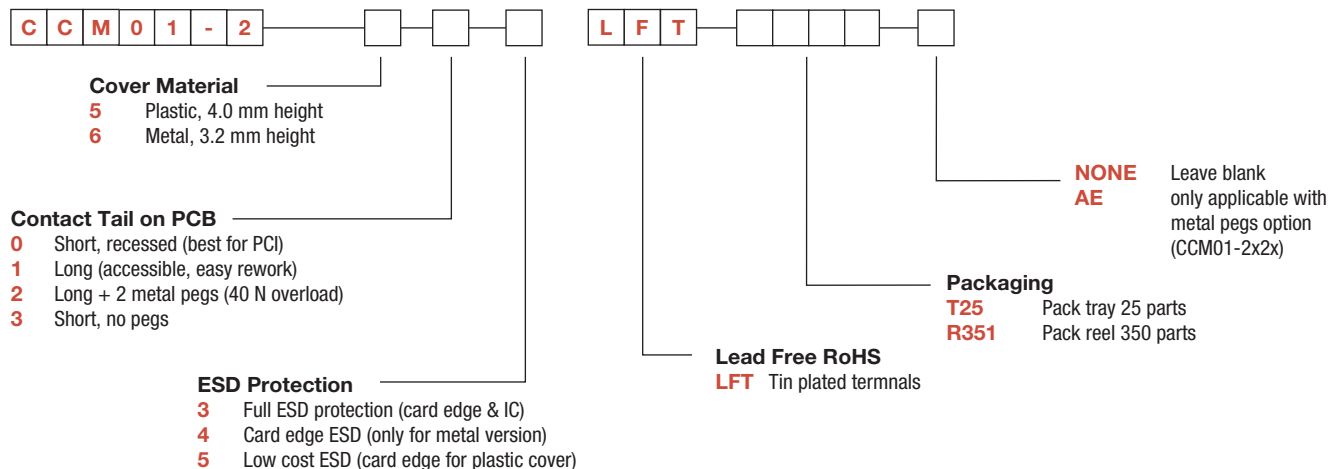




# CCM01 MK5 Series

## CCM01-2604 LFT T25 Metal cover, short tails

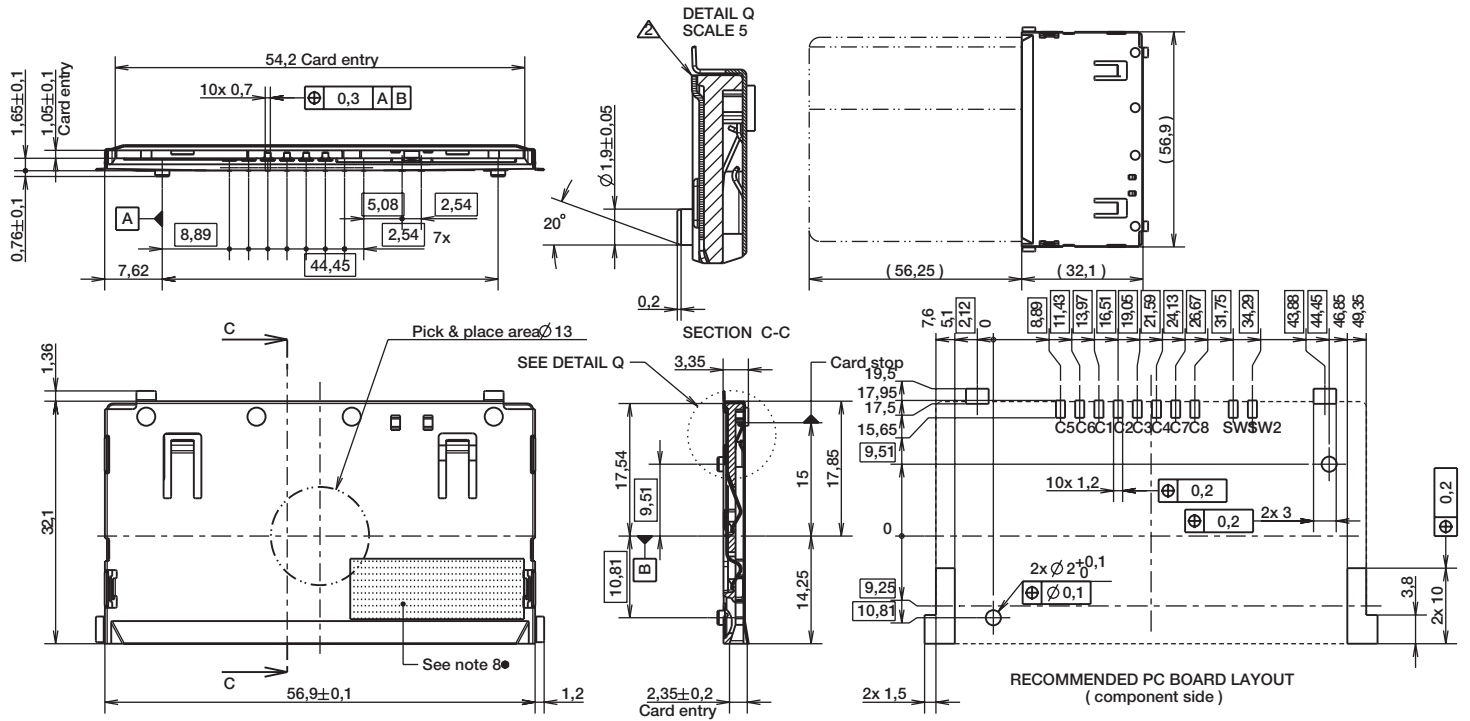

## CCM01-2513 LFT T25 Plastic cover, long tails, full ESD protection

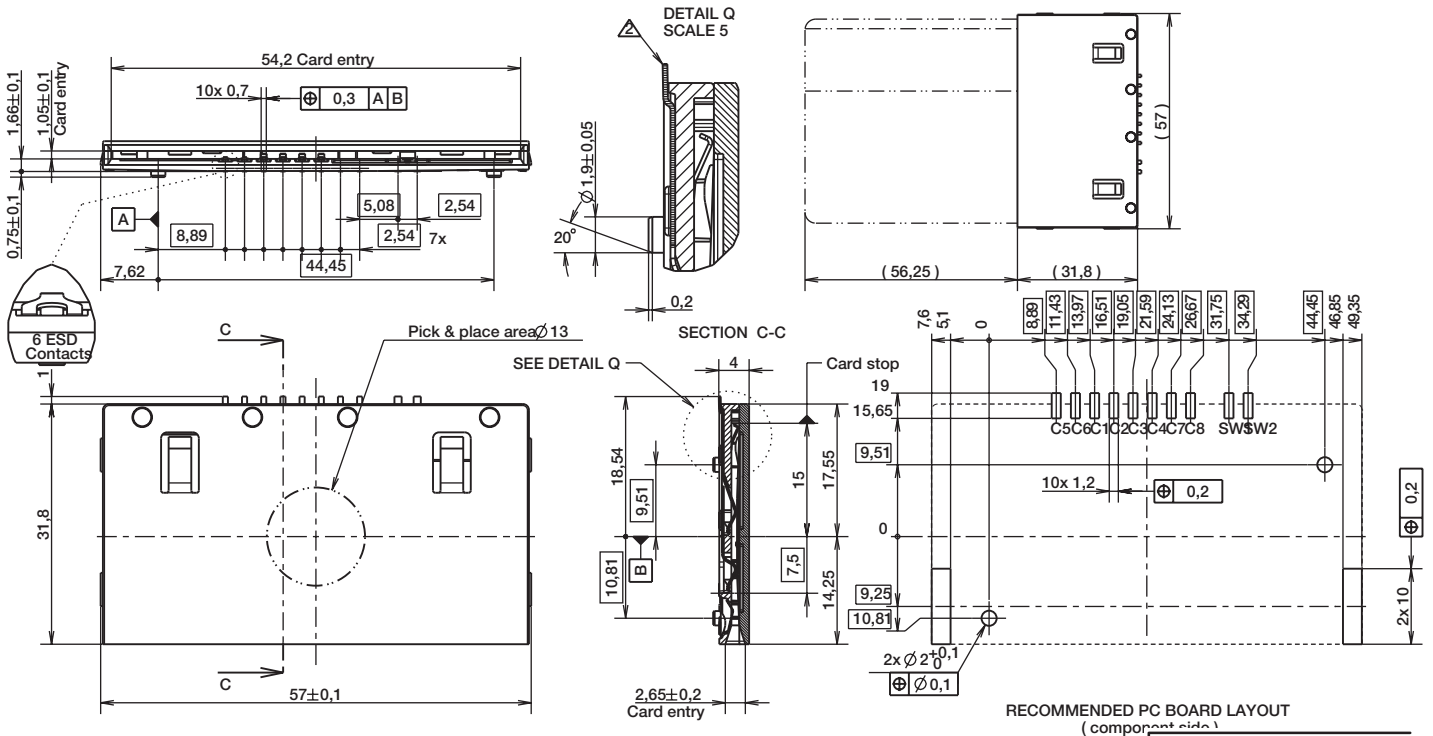


14 May 18

Dimensions are shown in mm  
Specifications and dimensions subject to change


www.ckswitches.com

# CCM01 MK5 Series

## CCM01-2523 LFT T25 Plastic cover, long tails, metal pegs

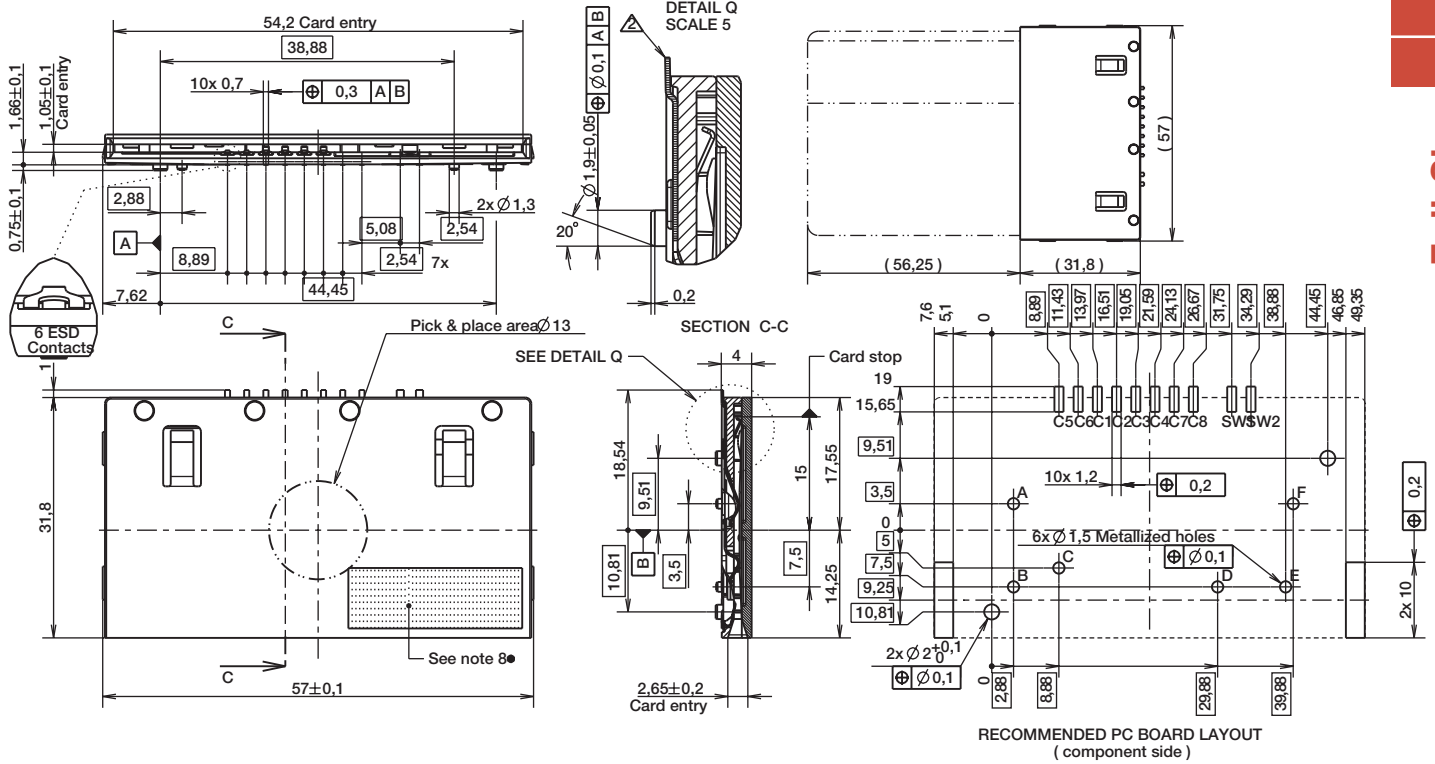

## CCM01-2614 LFT T25 Metal cover, long tails, no ESD protection

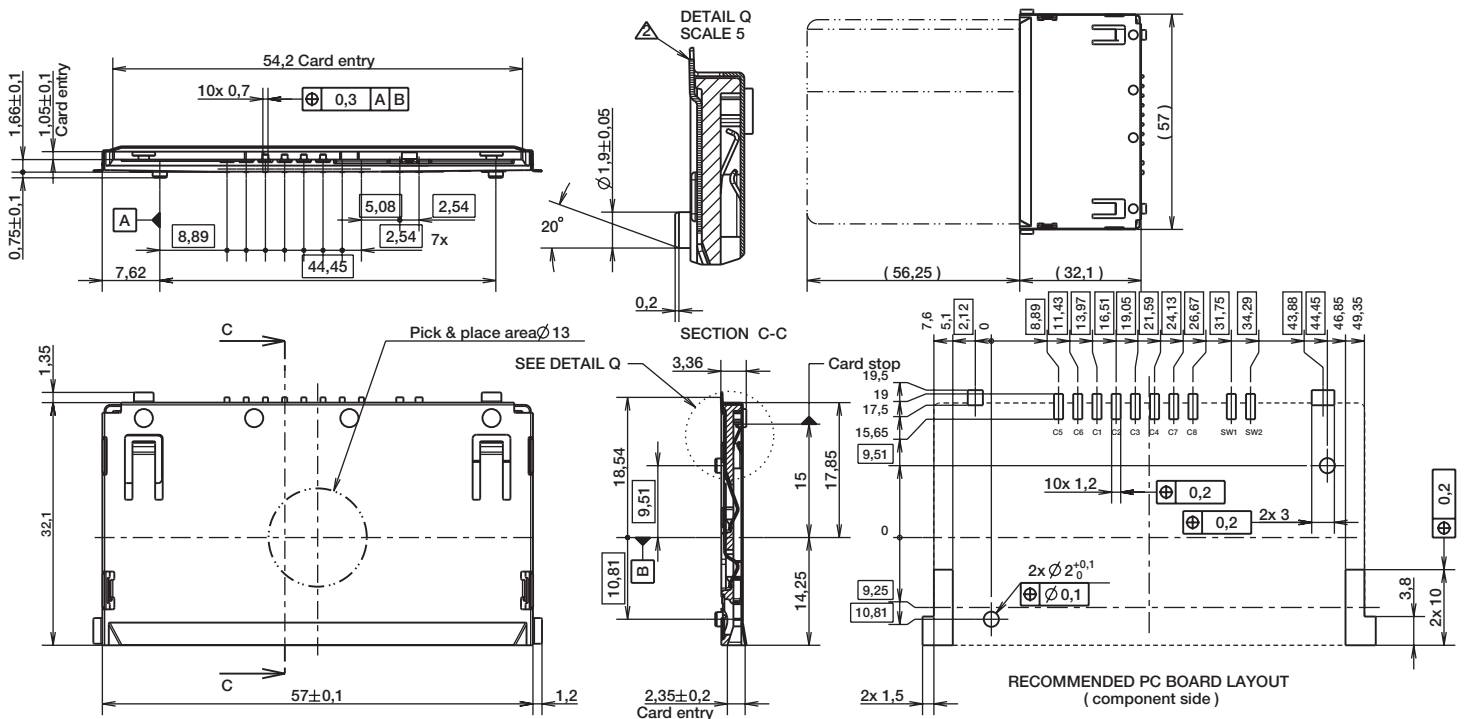


Dimensions are shown in mm  
Specifications and dimensions subject to change

www.ckswitches.com



14 May 18

# CCM02 MK2 Series



## Features

- Operating life 500,000 cycles
- Insertion force 40N
- EMV
- PCI & PCI ready
- Card detection sealed switch

## Typical Applications

- Transaction
- Identification
- POS

## Mechanical

Number of Contacts	8
Mechanical life	500,000 cycles min
Card insertion force	10N to 40N
Card extraction force	1N min / 10N max
Contact force	0,2N / 0,50N max
Card detection switch	0,8 N max for actuation (end travel switch actuation force actuates when card is 0,9mm from card stop)
	1,8 N max for complete depression
Vibration Frequency	10 to 500 Hz. Acceleration 50m/s <sup>2</sup> Duration 6 hours - amplitude 0,35mm
Max elect. discontinuity	1µs
Shock	Peak value 500 m/s <sup>2</sup> – Duration 11 ms 3 shocks in each direction of each axis

## Packaging

Tray 30 parts / Cartons 300 parts  
Reel 120 parts

## Soldering

Compatible with lead free reflow soldering process  
For version with security cover, please contact Customer Service for soldering recommendations.

## Contact Electrical Data

Insulation resistance	1,000 MΩ min
Resistance	100 mΩ max
Current rating	10 µA min / 1 A max
Dielectric strength	750 Vrms min

## Switch Electrical Data

Card detection switch	Normally open
Contact resistance	100 mΩ max
Dielectric strength	250 Vrms min
Current rating	1 mA min / 10 mA max
Maximum power	0.2 VA

## Environmental Data

Operating temperature	-40°C to +85°C
Damp heat	IEC 512 test number 11c (10 days)
Salt mist	IEC 512 test number 11f (96 hours)

Card detection switch  
RoHS compliant

Sealed against dust

Designation	Termination	Contact Type	PCI Features		Total Height (mm)	Dimension	PCB version
			I/O Protect	Security Cover			
CCM02-2503LFT	THT	landing			6,25	38,5 X 55,6	4 clips
CCM02-2504LFT	SMT	landing			6,25	38,5 X 55,6	4 clips
CCM02-F503LFT	THT	friction			6,25	38,5 X 55,6	4 clips
CCM02-F504LFT	SMT	friction			6,25	38,5 X 55,6	4 clips
CCM02-F844LFT	SMT	friction	Yes	Yes	6,6	40,5 X 58	4 metal pegs



## PCI: I/O Protect

### Definition

Special accessory in order to avoid and detect frontal access to data contact. It is electrically connected to the PCB through spring finger contacts.



### Process

It must be in open position during the reflow soldering of the connector and has to be locked in closed position after soldering.



### I/O Protect locking tool

C&K is proposing a manual tool to lock the I/O protect accessory after soldering.  
Ordering code: C-CM02-E50

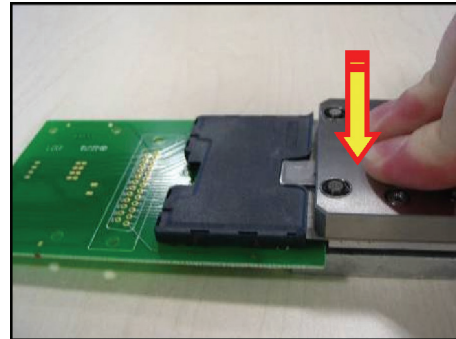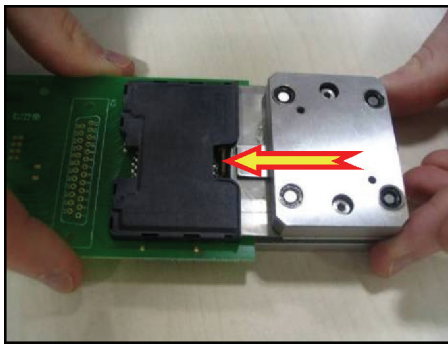

## PCI: Security Cover



### Definition

It is a multilayer cover placed over the connector to avoid and detect data contact access, especially from the top. It is connected to the PCB through 6 SMT terminals that are soldered at the same time as the other smart card terminals.



### Process

Please contact your Sales Representative for advice and recommendations about soldering this version.


# CCM02 MK2 Series

CCM02-2503 LFT / CCM02-F503 LFT

Full Size

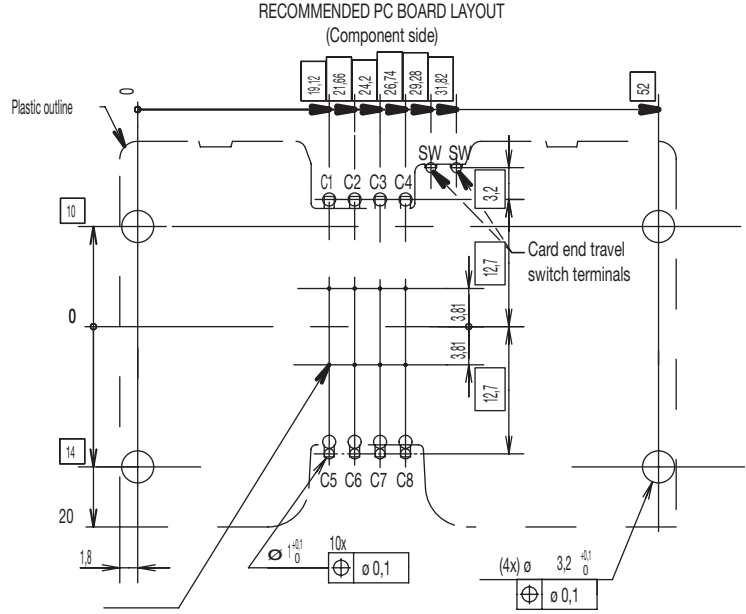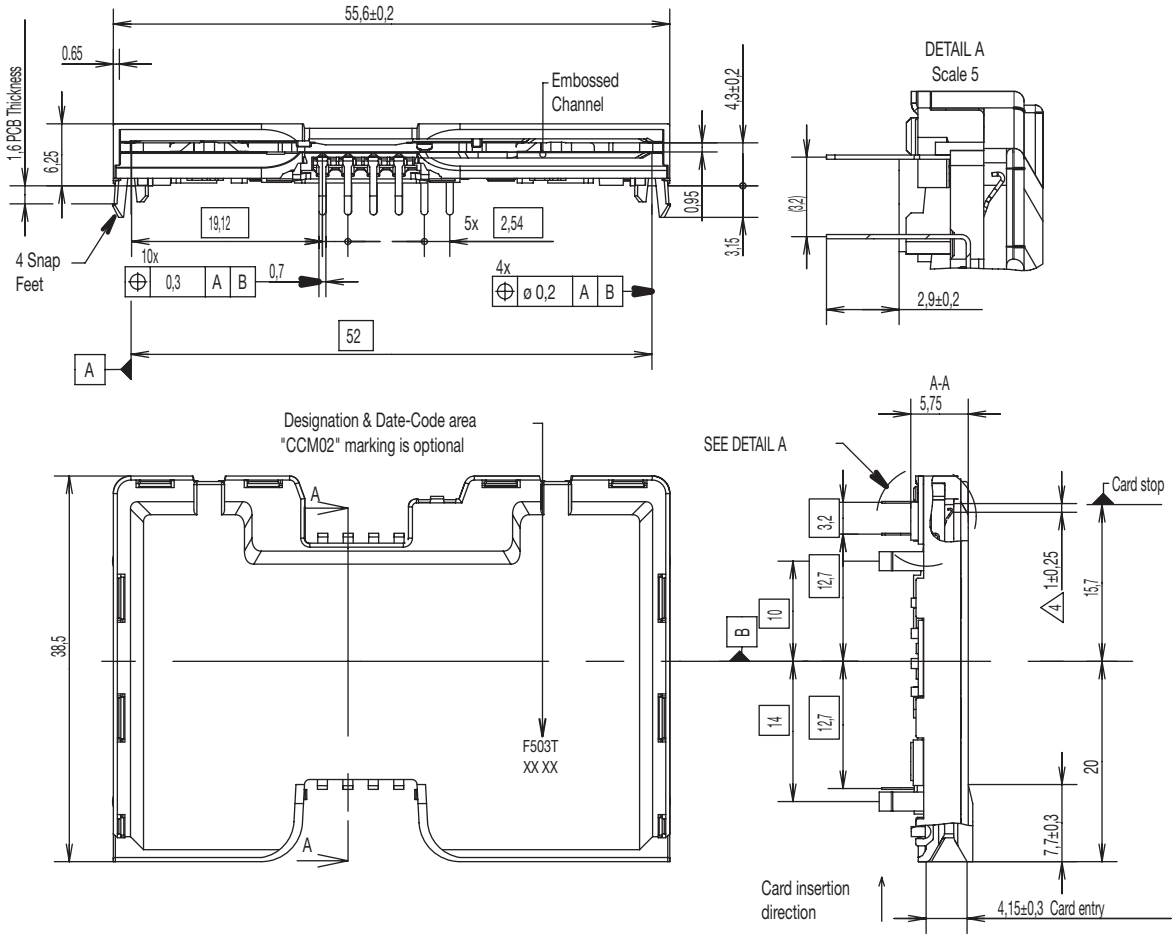

Contact location according to ISO/IEC 7816-2

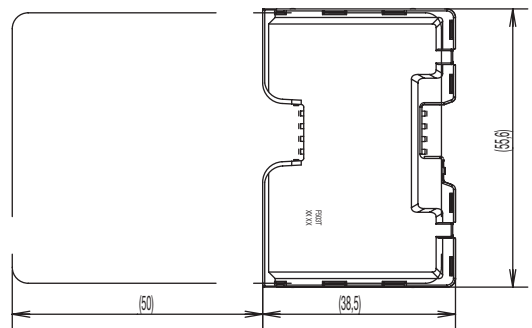

Dimensions are shown in mm  
Specifications and dimensions subject to change




www.ckwitches.com



# CCM02 MK2 Series

## CCM02-2504 LFT / CCM02-F504 LFT

Full Size

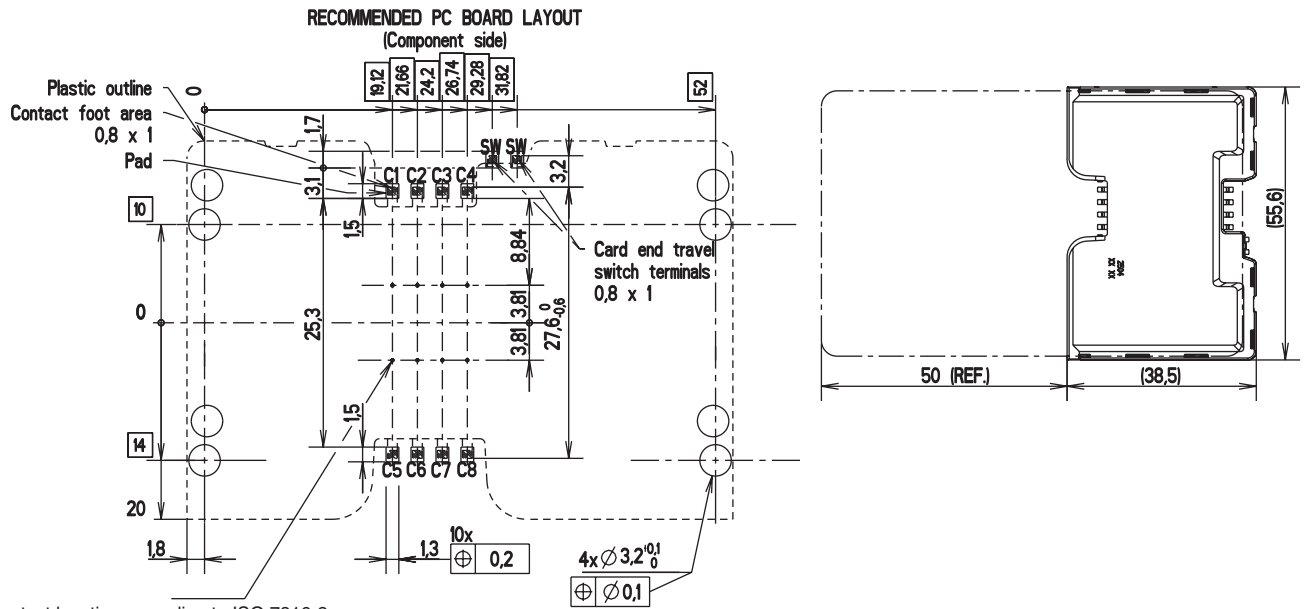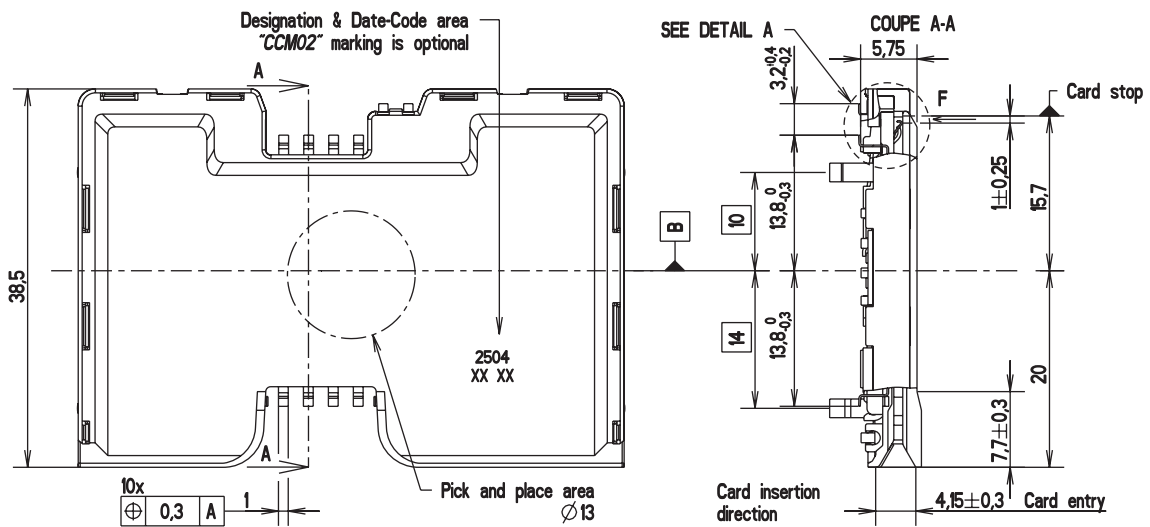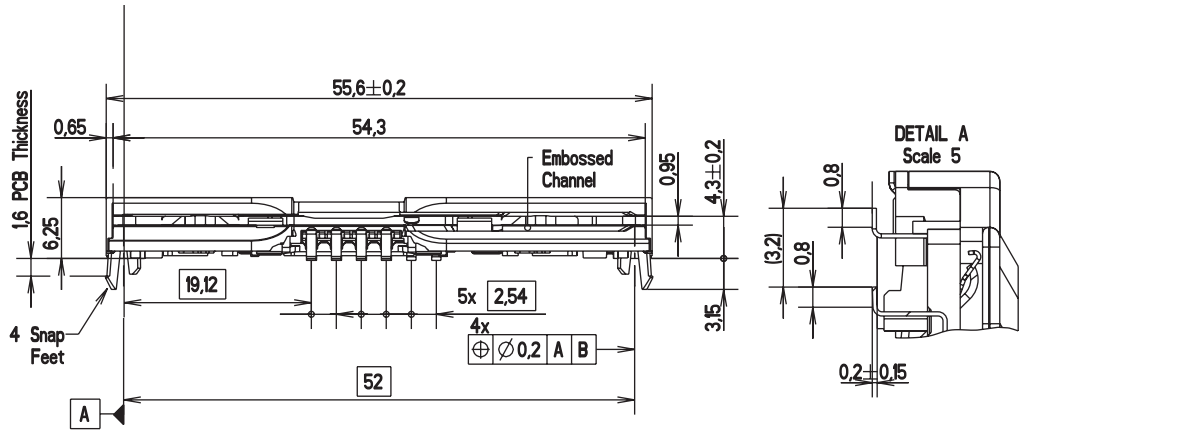

Contact location according to ISO 7816-2

Scale 1



Dimensions are shown in mm  
Specifications and dimensions subject to change


www.ckwitches.com






# CCM02 MK2 Series

## CCM02-F844A LFT / CCM02-F844B LFT

Full Size

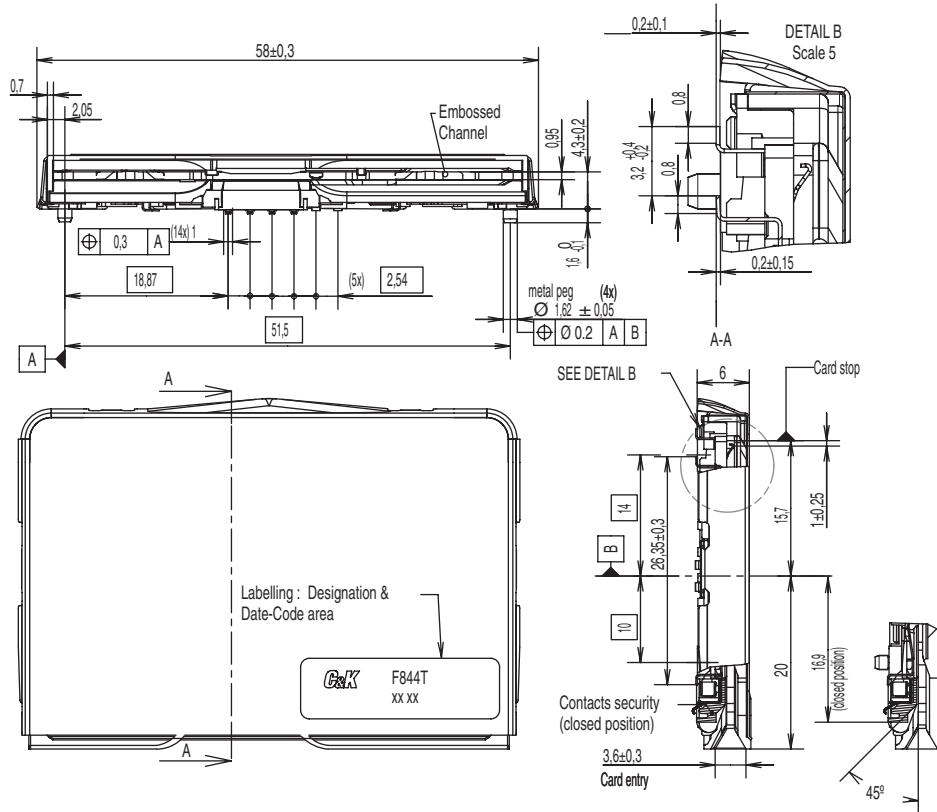

RECOMMENDED PC BOARD LAYOUT  
(Component side)

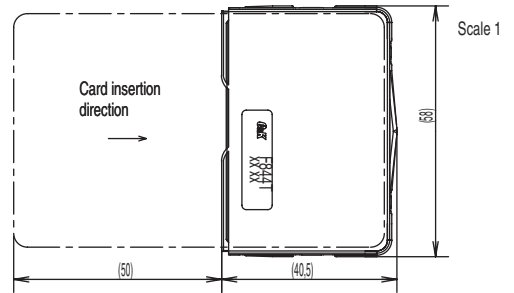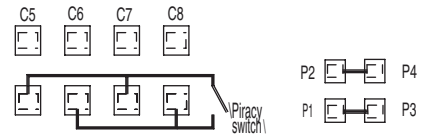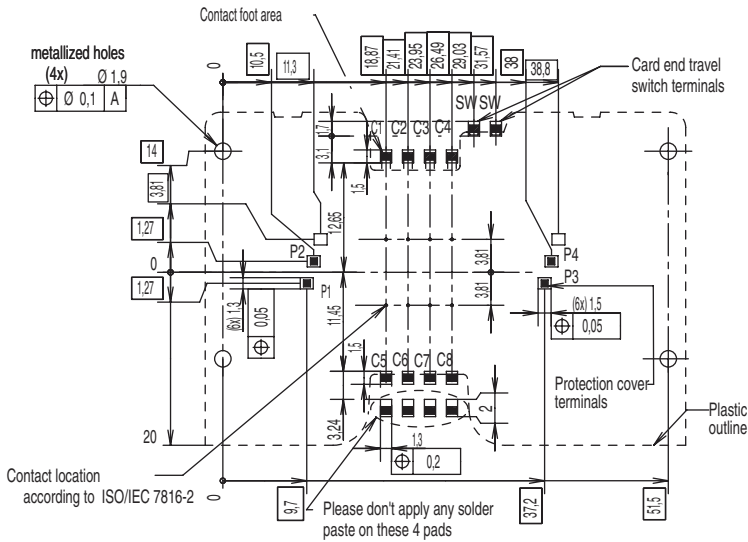

Dimensions are shown in mm  
Specifications and dimensions subject to change


www.ckwitches.com

## Features

- ID1 full size card acceptance
- Card detection sealed switch
- Compatible with pick and place and lead free soldering

## Typical Applications

- Transaction
- POS
- Identification



## Mechanical

Number of contacts	6 or 8
Mechanical life	50,000 cycles
Card insertion force	10N max
Card extraction force	1N min / 10N max
Contact force	0,4N to 0,7N
Card detection switch	0,8 N max for actuation (end travel switch actuation force actuates when card is 0,9mm from card stop) 1,8 N max for complete depression
Vibration Frequency	10 to 500 Hz. Acceleration 50m/s <sup>2</sup> Duration 6 hours - amplitude 0,35mm
Shock	Peak value 500 m/s <sup>2</sup> – Duration 11 ms 3 shocks in each direction of each axis
Max elect. discontinuity	1µs

## Packaging

See table below

## Soldering Process

Compatible with lead free SMT reflow soldering process

## Contact Electrical Data

Insulation resistance	1000 MΩ min
Contact resistance max	100 mΩ max
Switching current	10 µA min / 1 A max
Dielectric strength	750 Vrms min

## Switch Electrical Data

Card detection switch	Normally open
Rc card detection switch	100 mΩ max
Dielectric strength	250 Vrms min
Switch current rating	1 mA min / 10 mA max
Maximum switch power	0.2 VA

## Environmental Data


Operating temperature	-40°C to +85°C
Salt mist	IEC 512 test number 11f (96 hours)
Damp heat	IEC 512 test number 11c (10 days)
Card detection switch	Sealed against dust
RoHS compliant	

Designation	Housing Type	# of Contacts	Contact Force	Total Height (mm)	Total Dim. (mm)	Packaging
CCM04-5427LFT	standard	8	0,4N to 0,7N	2,65	18,75 X 25	reels of 1,000 pcs
CCM04-5436LFT	standard	8	0,4N to 0,7N	0,90	18,75 X 26,9	reels of 1,000 pcs
CCM04-5468LFT	stand-off	8	0,4N to 0,7N	3,5	18,75 X 24	reels of 1,000 pcs
CCM04-5454LFT	standard	8	0,4N to 0,7N	0,90	18,75 X 26,9	reels of 1,000 pcs
CCM04-5455LFT	standard	8	0,4N to 0,7N	0,90	18,75 X 26,9	reels of 1,000 pcs

# CCM04 MK4 Series

## CCM04-5427 LFT

Full Size

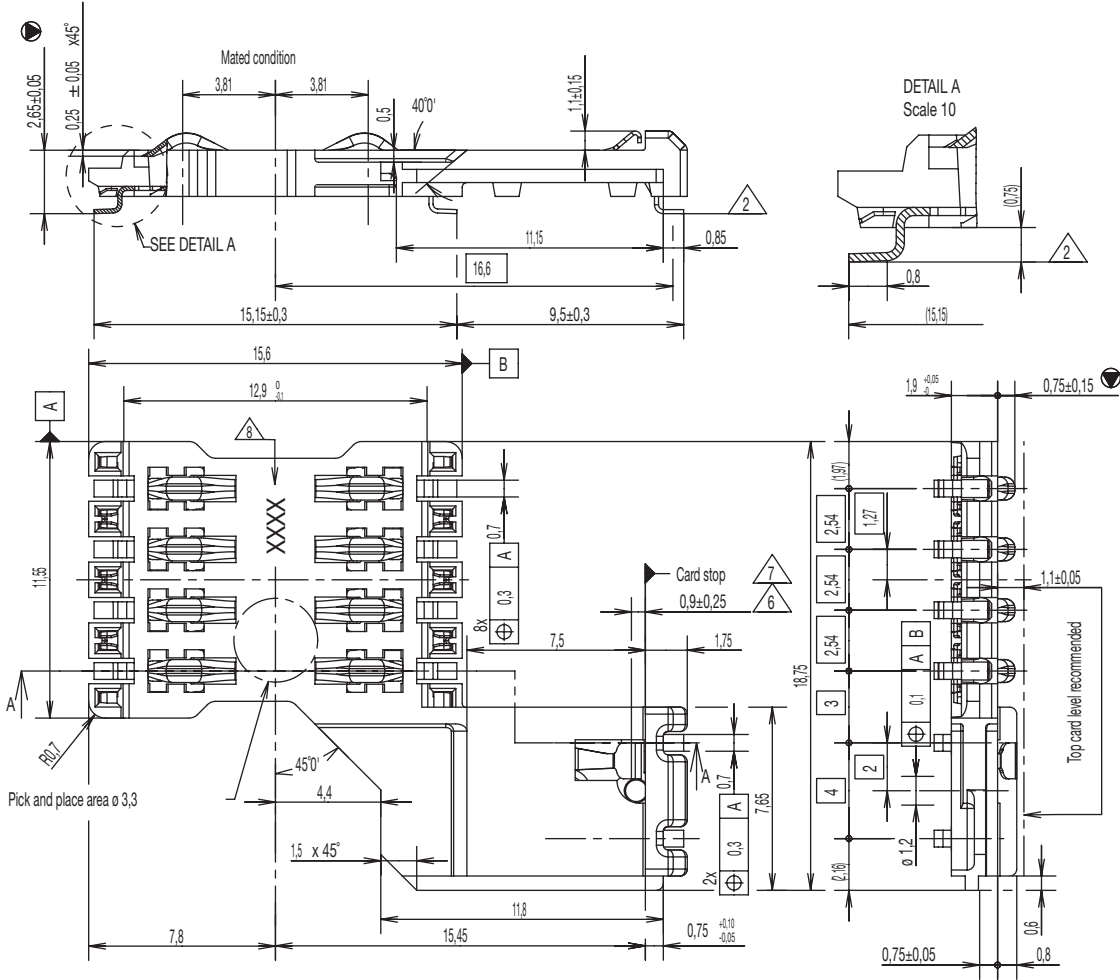


Dimensions are shown in mm  
Specifications and dimensions subject to change


www.ckwitches.com

# CCM04 MK4 Series

## CCM04-5436 LFT

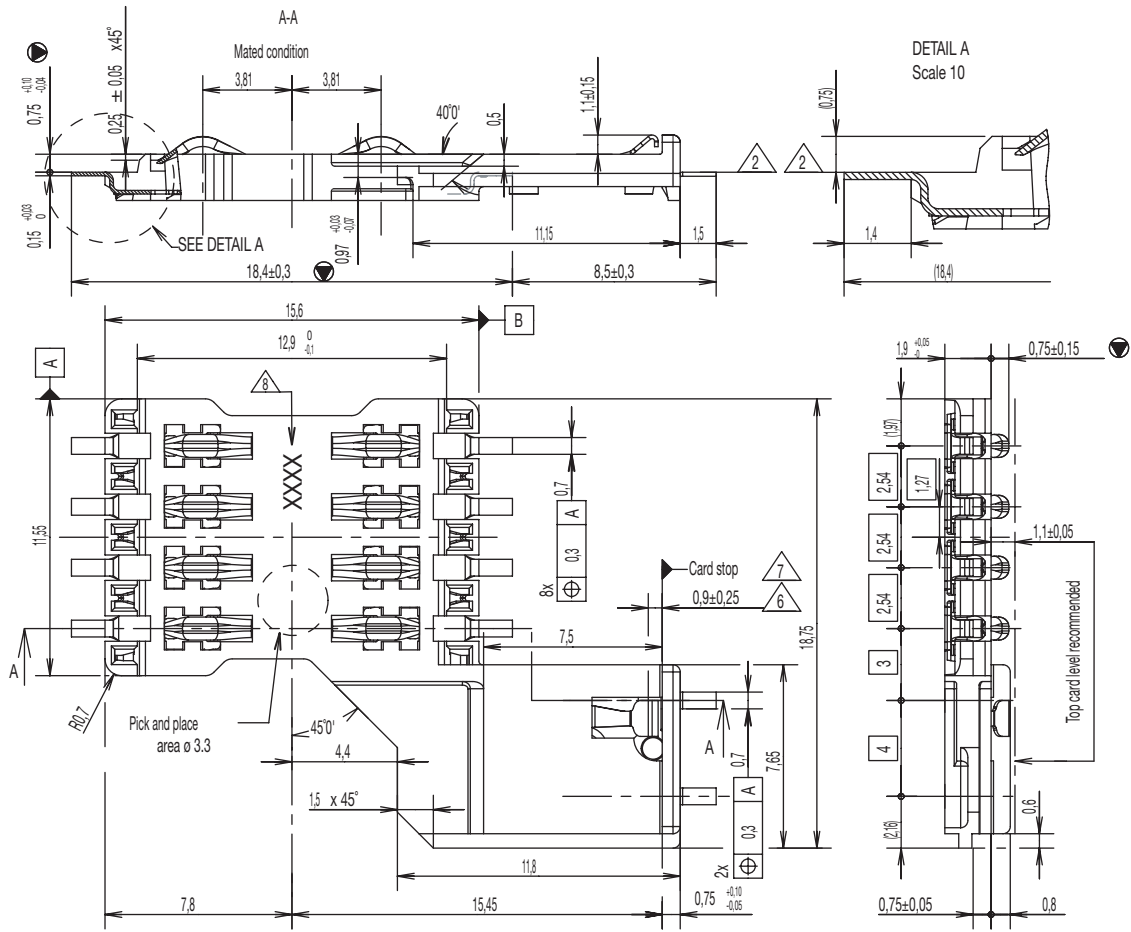

RECOMMENDED PC BOARD LAYOUT  
(Component side)

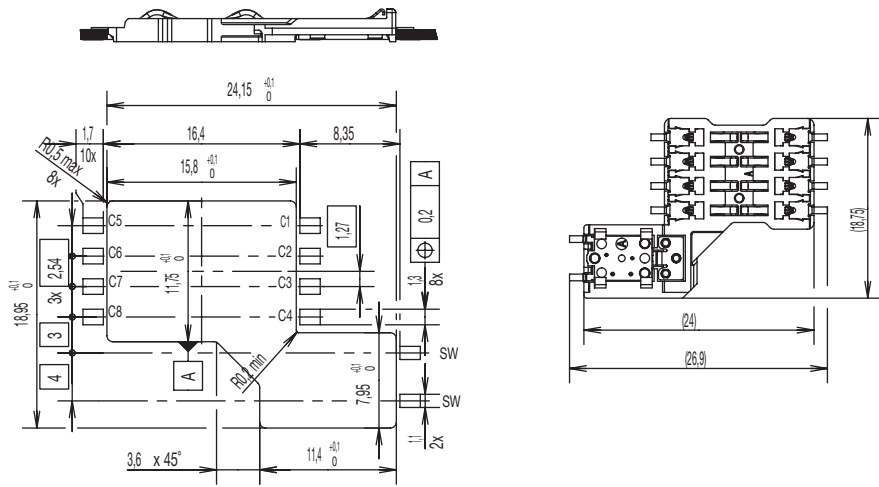

Dimensions are shown in mm  
Specifications and dimensions subject to change

www.ckwitches.com



Full Size





# CCM04 MK4 Series

## CCM04-5468 LFT

Full Size

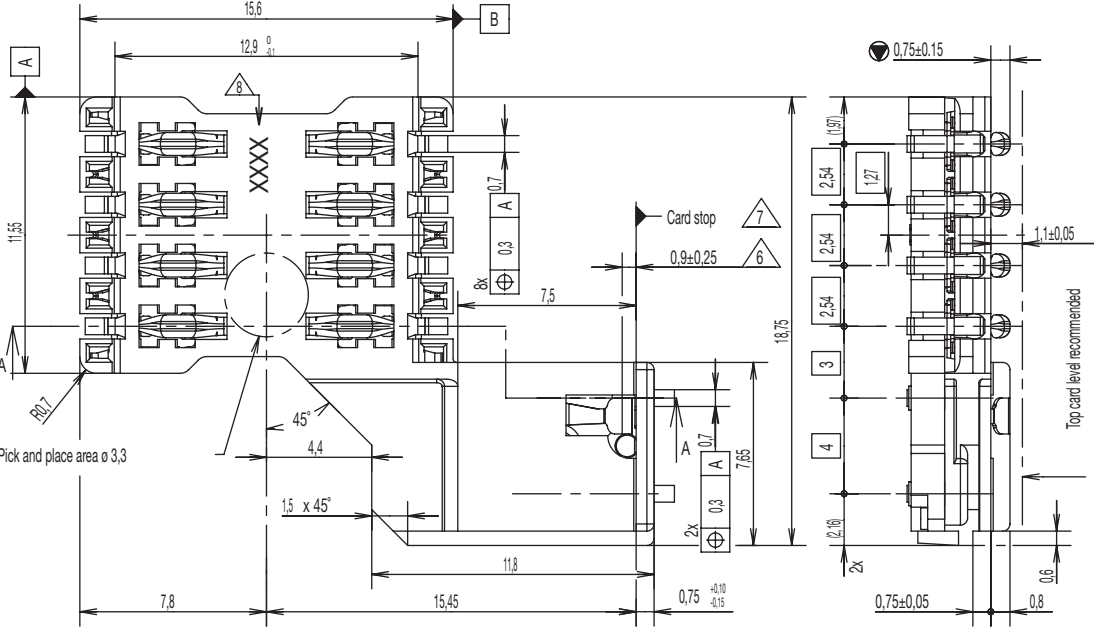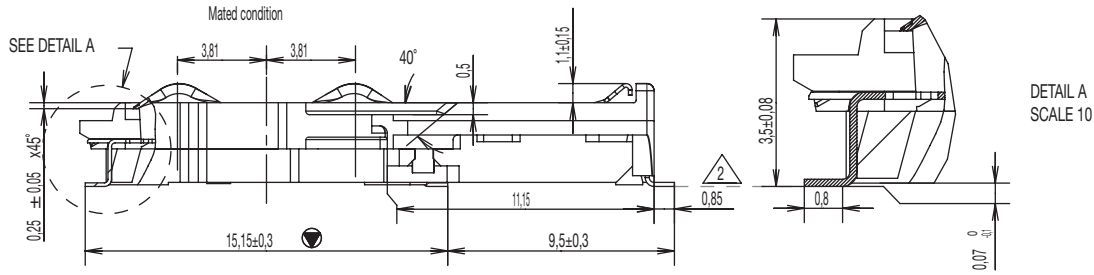

RECOMMENDED PC BOARD LAYOUT  
(Component side)

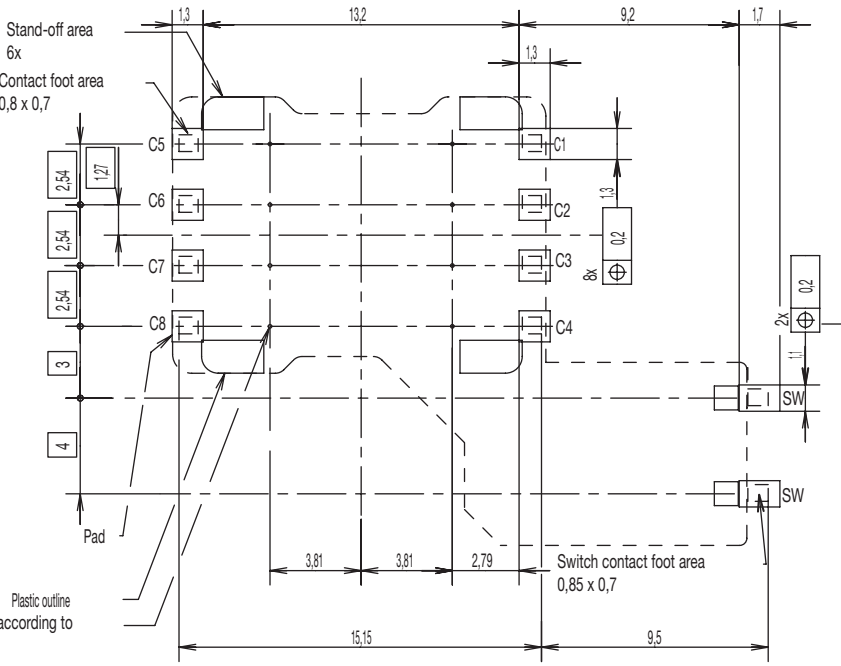

Plastic outline  
Contact location according to  
ISO/IEC 7816-2




Dimensions are shown in mm  
Specifications and dimensions subject to change

www.ckwitches.com



# CCM04 MK4 Series

## CCM04-5454 LFT

Full Size

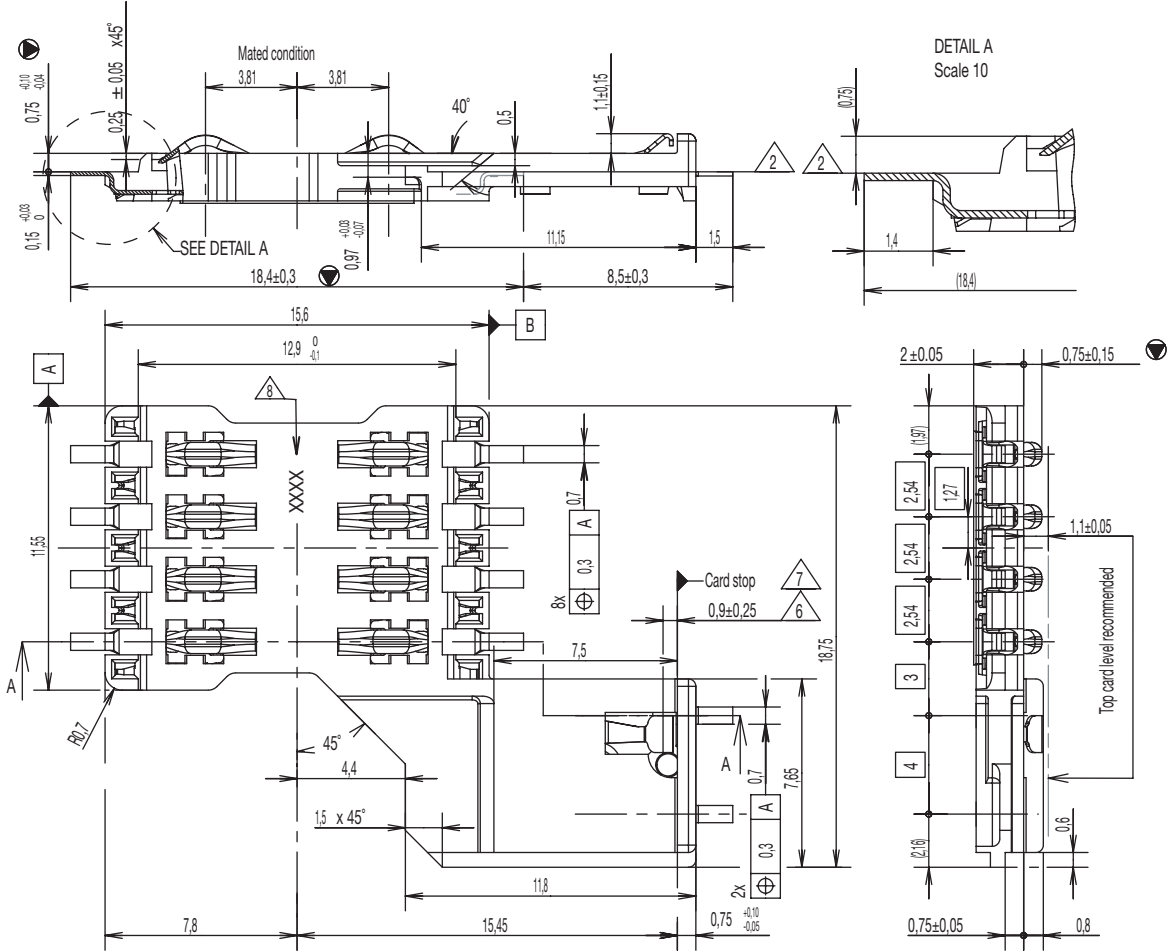

RECOMMENDED PC BOARD LAYOUT  
(Component side)  
Scale 2,5

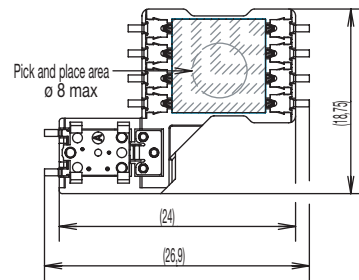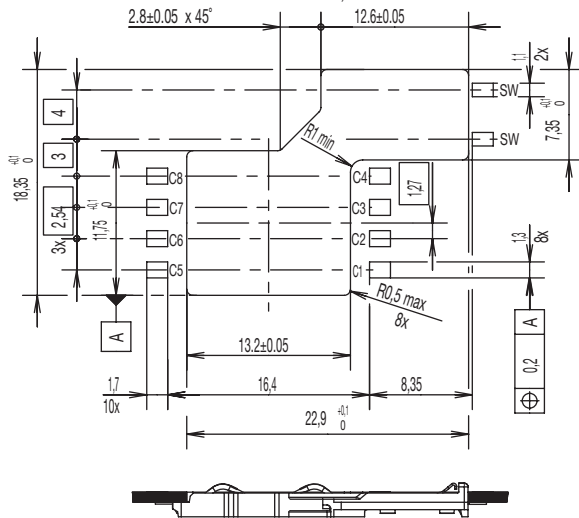




Dimensions are shown in mm  
Specifications and dimensions subject to change

www.ckwitches.com

# CCM04 MK4 Series

CCM04-5455 LFT

Full Size

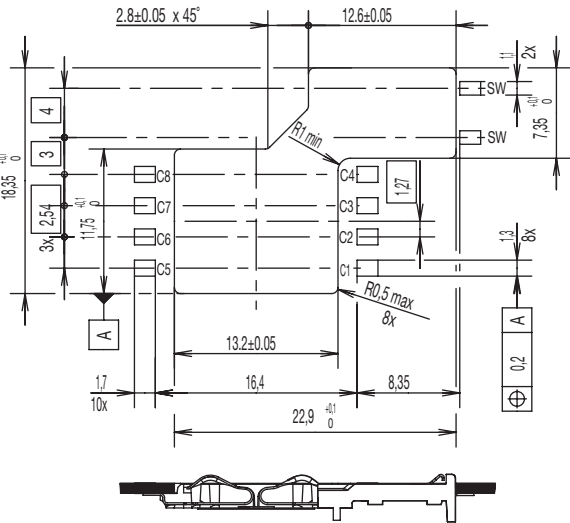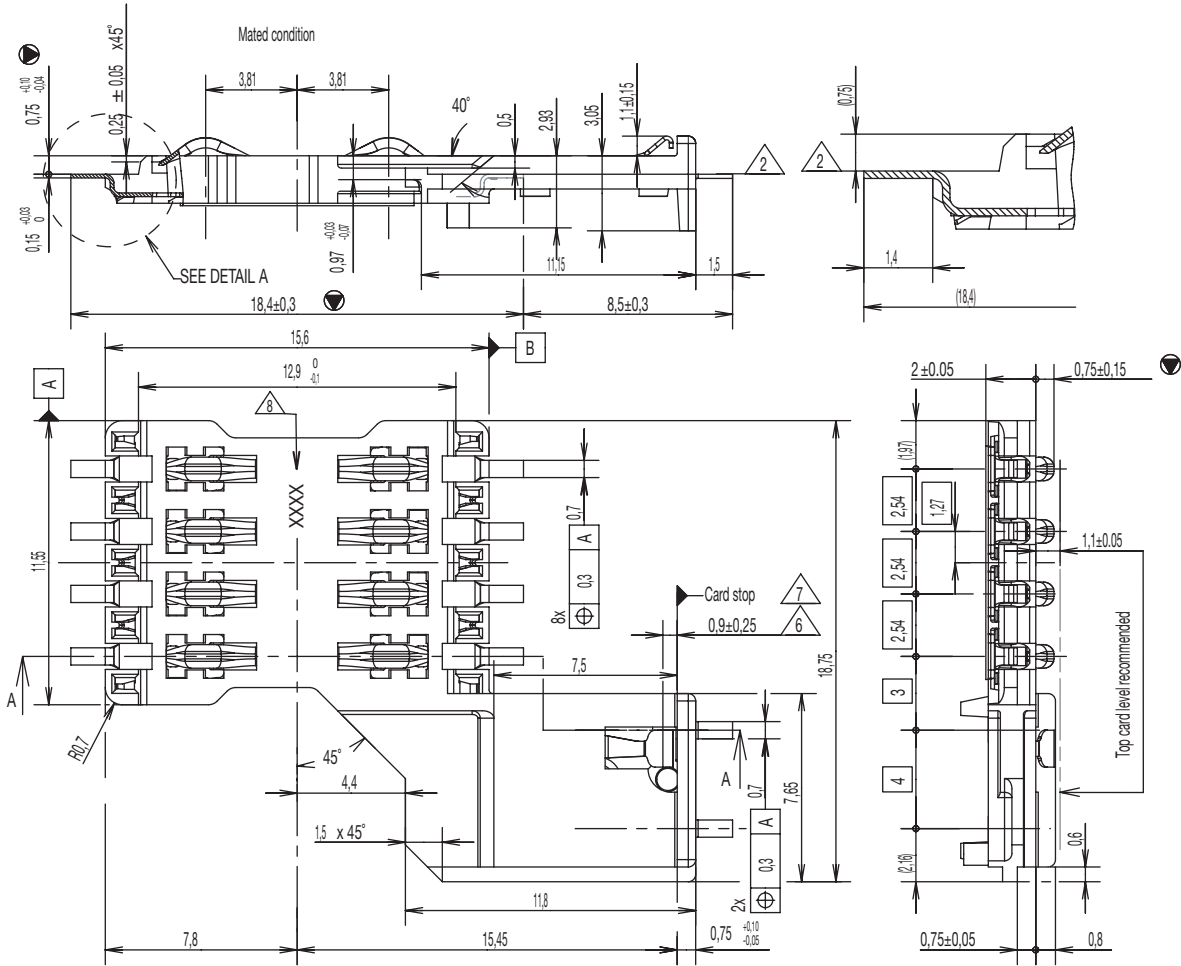

Dimensions are shown in mm  
Specifications and dimensions subject to change

www.ckwitches.com

**C&K**<sup>®</sup>

**SIM / SAM Cards**




# CCM03 MK2 Series

## Features

- SIM/SAM card acceptance
- Hinged and fixed covers
- Compatible with pick and place and lead free soldering

## Typical Applications

- Handheld products
- Identification
- POS
- Automotive



## Mechanical

Number of Contacts	6 or 8
Mechanical life, hinged cover	10,000 cycles min
Mechanical life, fixed cover	50,000 cycles
Card insertion force	Hinged cover: 1N max Fixed cover: 3N max
Card extraction force	Hinged cover: 1N max Fixed cover: 0,80N min / 3N max
Contact force	0,25N min / 0,50N max
Slide locking force	2N min / 6N max 1,8N max. for complete depression
Vibration Frequency	10 to 500 Hz. Acceleration 50m/s <sup>2</sup> Duration 6 hours - amplitude 0,35 mm

## Contact Electrical Data

Insulation resistance	1,000 MΩ min
Resistance	100 mΩ max
Current rating	10 μA min / 1 A max
Dielectric strength	750 Vrms min

## Switch Electrical Data

Card detection switch	Normally open
Contact resistance	100 mΩ max
Dielectric strength	250 Vrms min
Current rating	1 mA min / 10m A max
Maximum power	0.2 VA

## Environment Data

Operating temperature	-40°C to +85°C
Damp heat	IEC 512 test number 11c (10 days)
Salt mist	IEC 512 test number 11f (96 hours)
RoHS compliant	

## Soldering Process

Compatible with lead free SMT soldering process




Designation	Contact Plating	Cover	# of Contacts	PCB Version	Card Presence Switch	Operating Life	Total Height (mm)	Dim. (mm)	Packaging
CCM03-3001LFT	inlay	hinged	6		without	10,000	2,55	17,2 x 29,65	reels of 1,000 pcs
CCM03-3002LFT	inlay	hinged	6	2 plastic pegs	without	10,000	2,55	17,2 x 29,65	reels of 1,000 pcs
CCM03-3003LFT	inlay	hinged	8		without	10,000	2,55	17,2 x 29,65	reels of 1,000 pcs
CCM03-3004LFT	inlay	hinged	8	2 plastic pegs	without	10,000	2,55	17,2 x 29,65	reels of 1,000 pcs
CCM03-3009LFT	gold	hinged	6		without	10,000	2,55	17,2 x 29,65	reels of 1,000 pcs
CCM03-3010LFT	gold	hinged	6	2 plastic pegs	without	10,000	2,55	17,2 x 29,65	reels of 1,000 pcs
CCM03-3011LFT	gold	hinged	8		without	10,000	2,55	17,2 x 29,65	reels of 1,000 pcs
CCM03-3012LFT	gold	hinged	8	2 plastic pegs	without	10,000	2,55	17,2 x 29,65	reels of 1,000 pcs
CCM03-3013LFT	gold	hinged	6		with	10,000	2,55	17,2 x 29,65	reels of 1,000 pcs
CCM03-3013 TP LFT	gold	hinged	6		with	10,000	2,55	17,2 x 29,65	reels of 1,000 pcs
CCM03-3512LFT	gold	hinged	6	Large soldering pads*	without	10,000	2,55	17,2 x 29,65	reels of 1,000 pcs
CCM03-3504LFT	gold	fixed	8		without	50,000	2,85	17,2 x 25,5	reels of 1,000 pcs
CCM03-3505LFT	gold	fixed	6		without	50,000	2,85	17,2 x 25,5	reels of 1,000 pcs
CCM03-3754LFT	inlay	fixed	6		with	10,000	3,5	16,5 x 18,05	reels of 1,000 pcs
CCM03-3760LFT	inlay	fixed	6		without	10,000	3,45	16,5 x 15,85	reels of 1,000 pcs
CCM03-3764LFT	inlay	none	6		with	10,000	2,9	16,5 x 15,85	reels of 1,000 pcs

\* Can go through reflow upside down




# CCM03 MK2 Series

## CCM03-3001 LFT / CCM03-3009 LFT

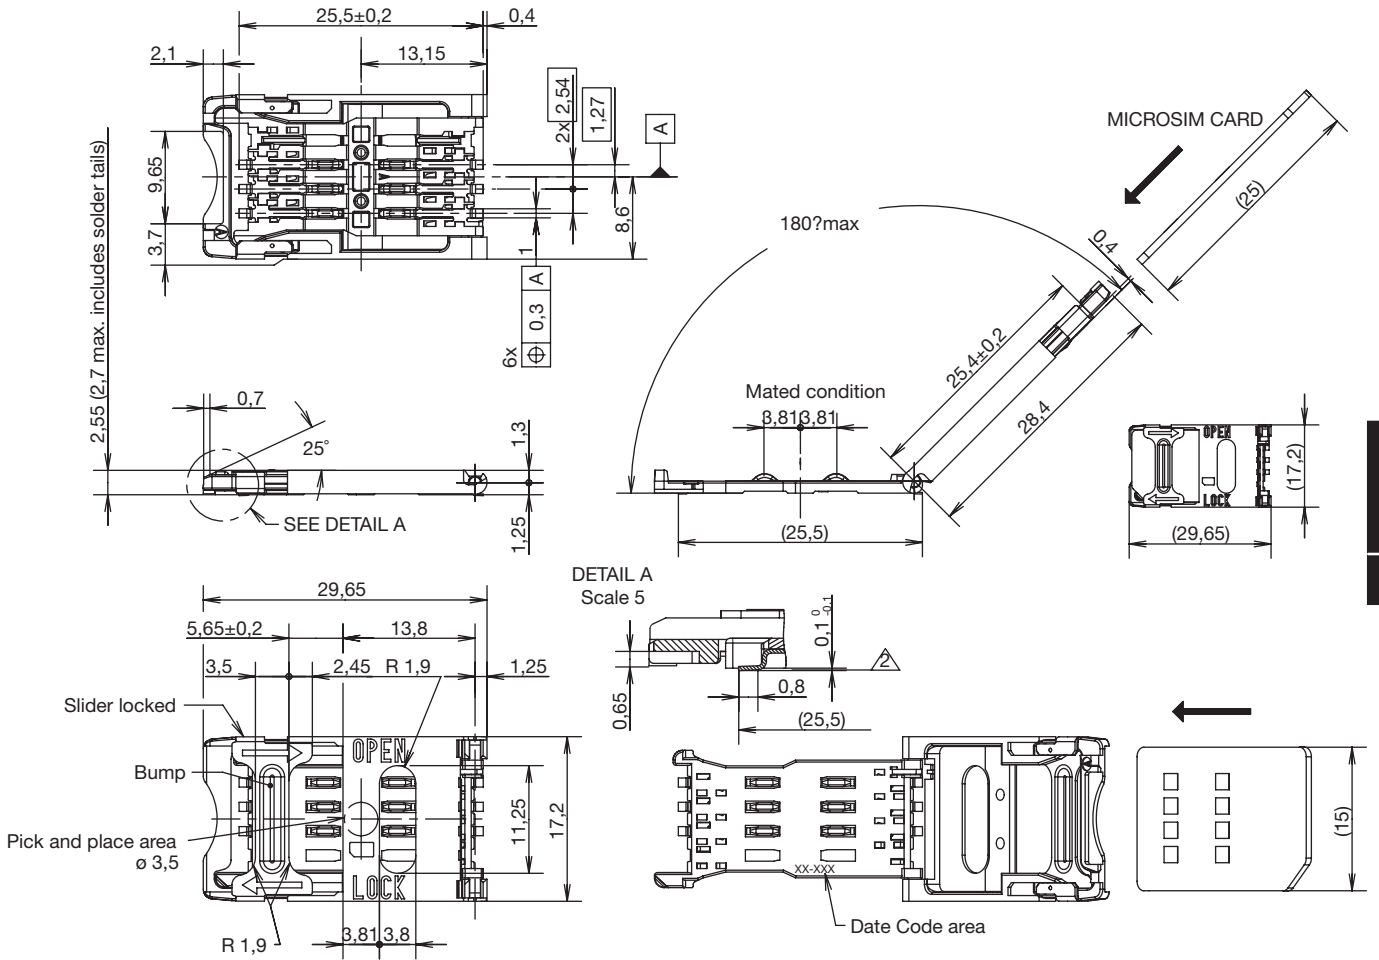


RECOMMENDED PC BOARD LAYOUT  
(Component side)

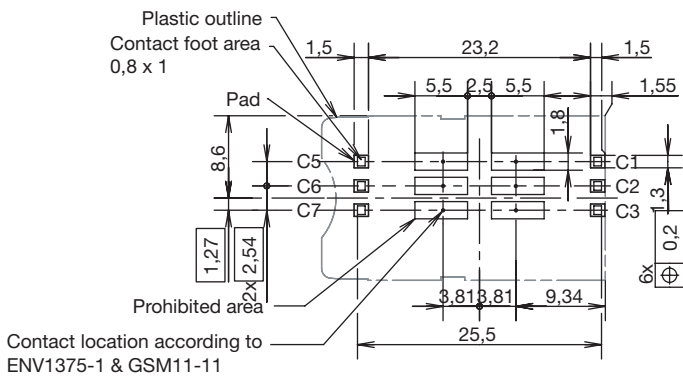

# CCM03 MK2 Series

CCM03-3002 LFT / CCM03-3010 LFT

SIM/SAM

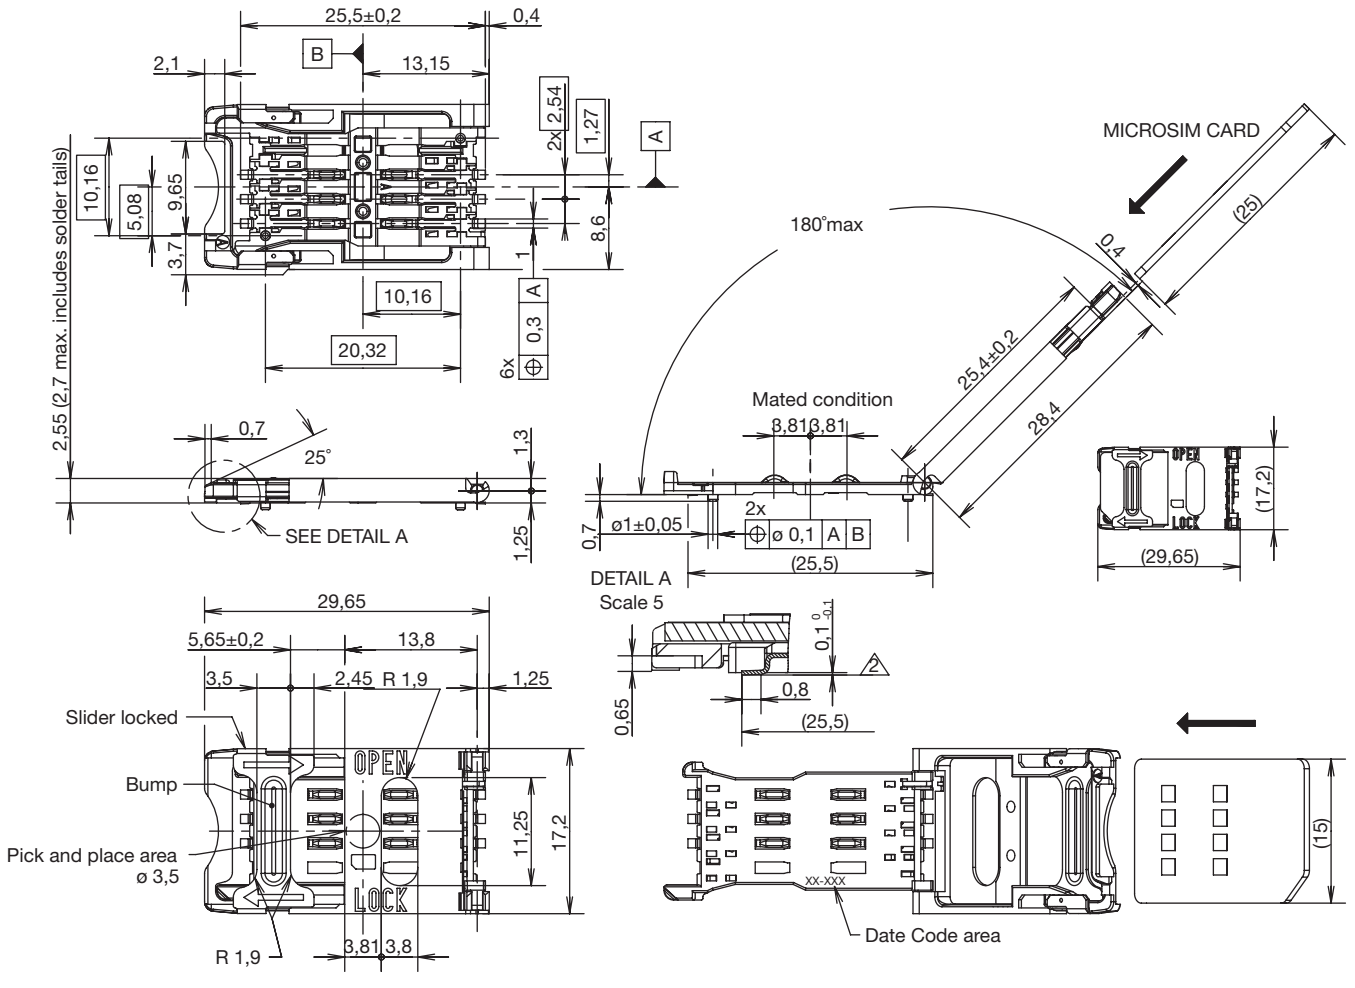

RECOMMENDED PC BOARD LAYOUT  
(Component side)




Dimensions are shown in mm  
Specifications and dimensions subject to change

www.ckswitches.com

# CCM03 MK2 Series


## CCM03-3003 LFT

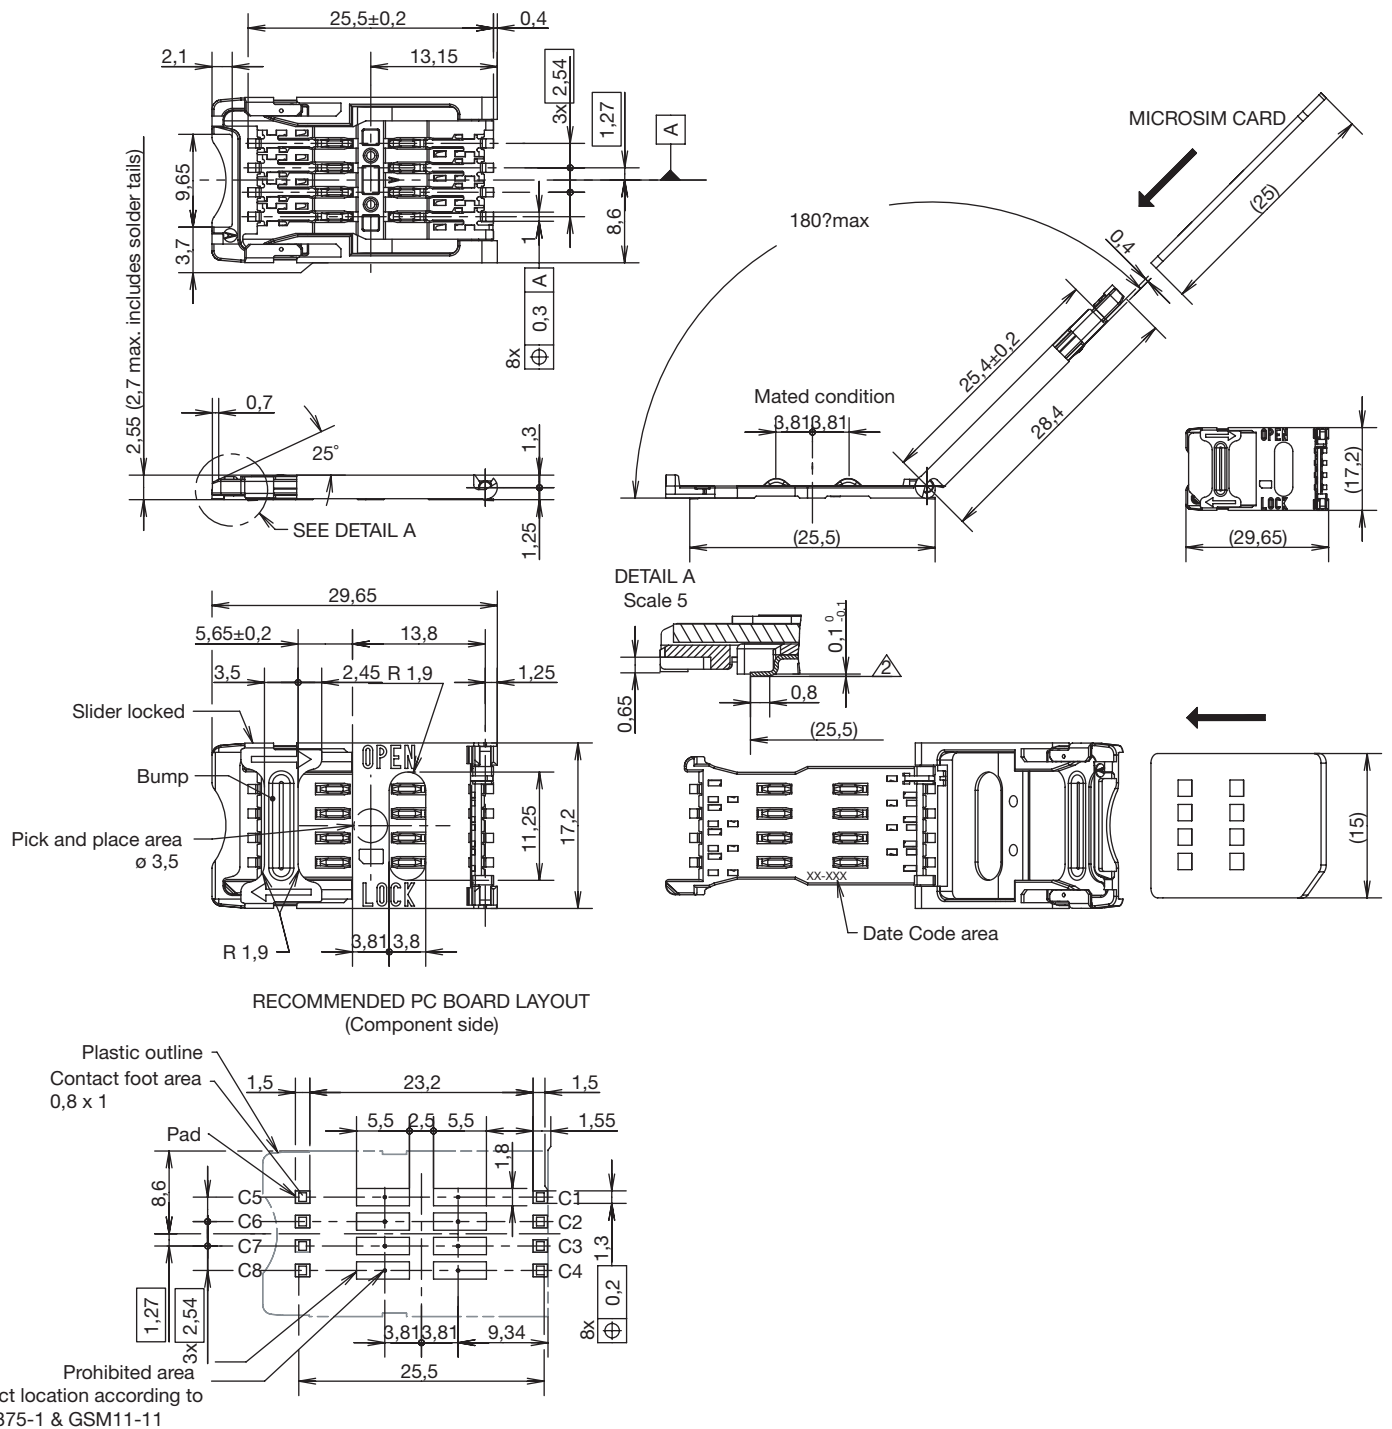


SIM/SAM

# CCM03 MK2 Series

CCM03-3004 LFT

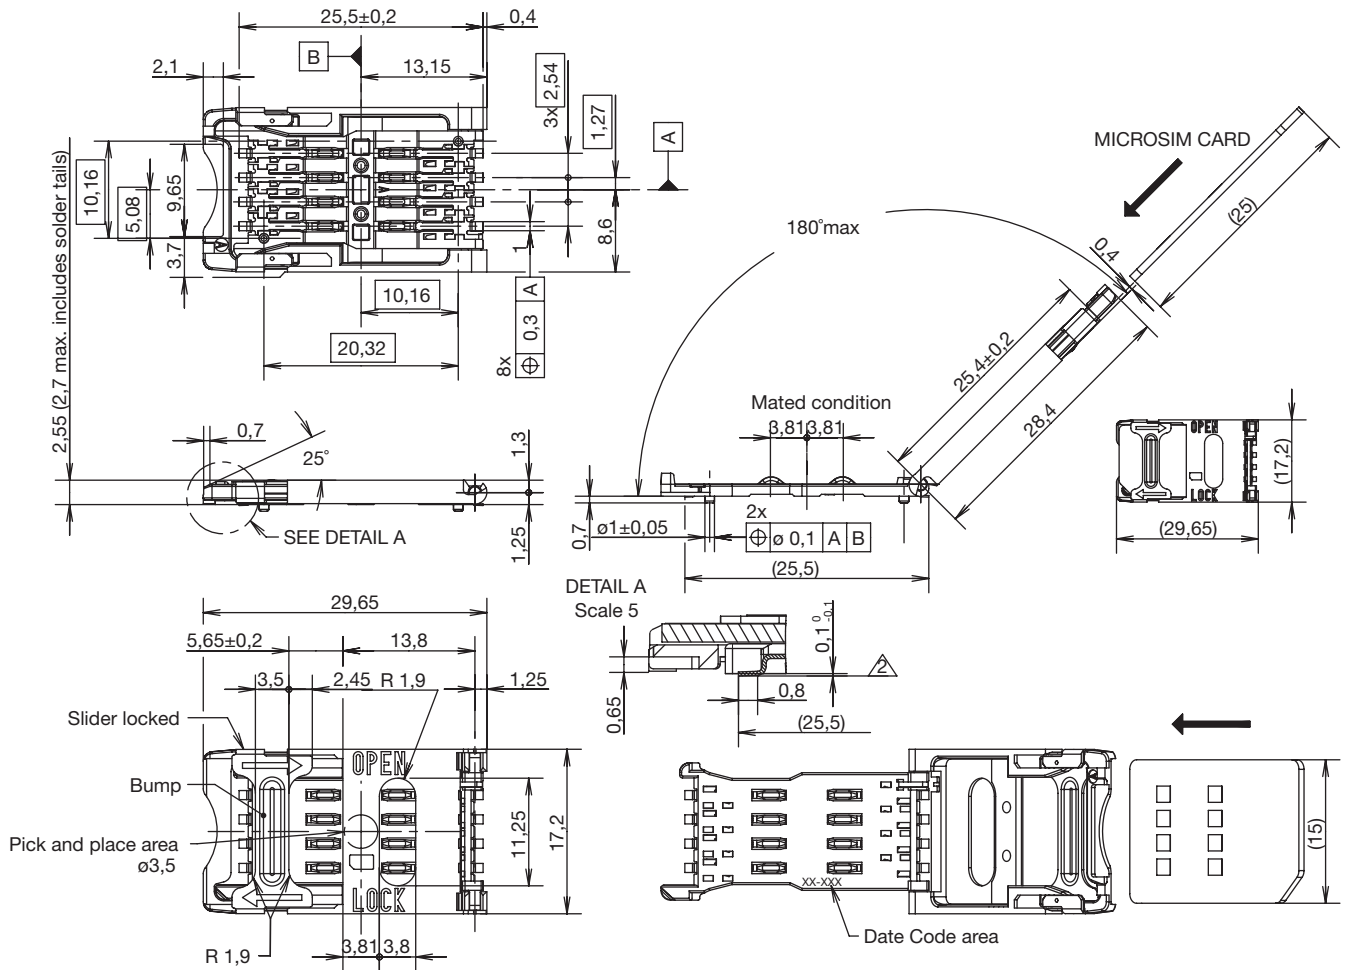

RECOMMENDED PC BOARD LAYOUT  
(Component side)

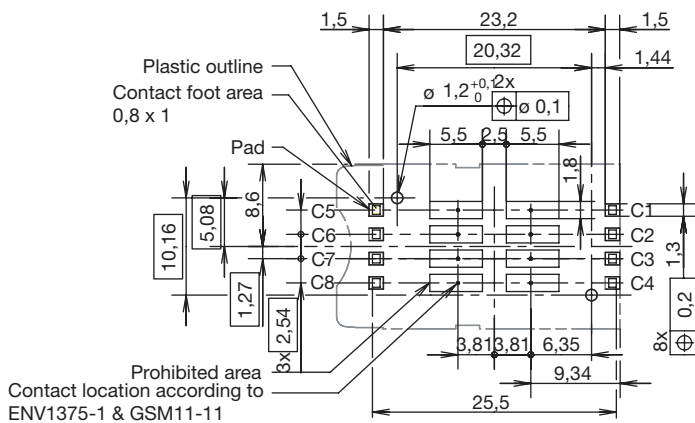

Dimensions are shown in mm  
Specifications and dimensions subject to change

www.ckswitches.com


SIM/SAM




6 nov 18

# CCM03 MK2 Series

## CCM03-3011 LFT

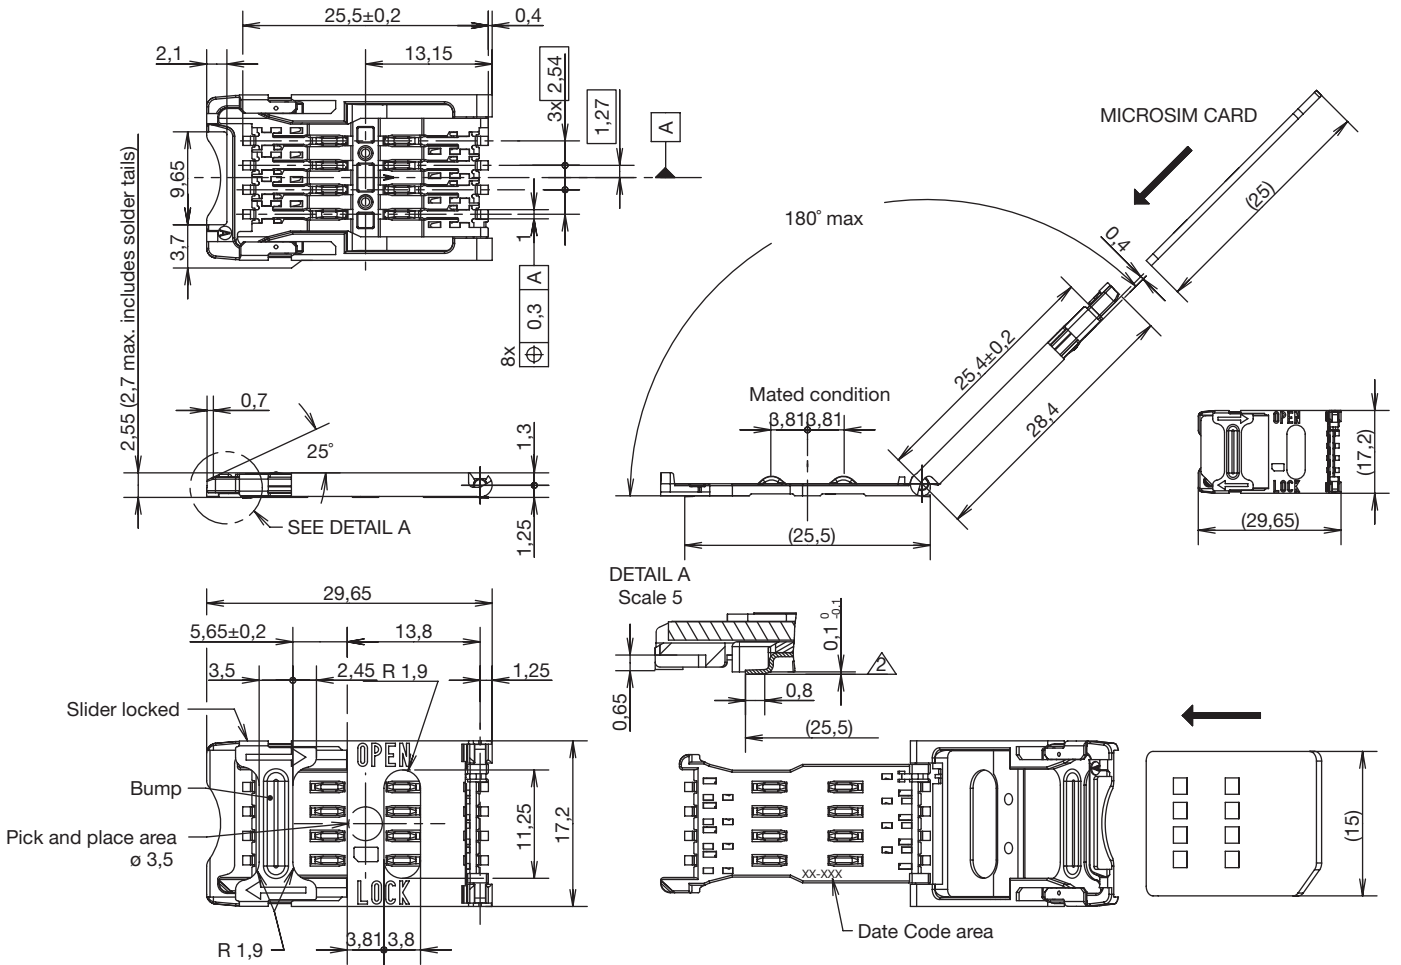

### RECOMMENDED PC BOARD LAYOUT (Component side)

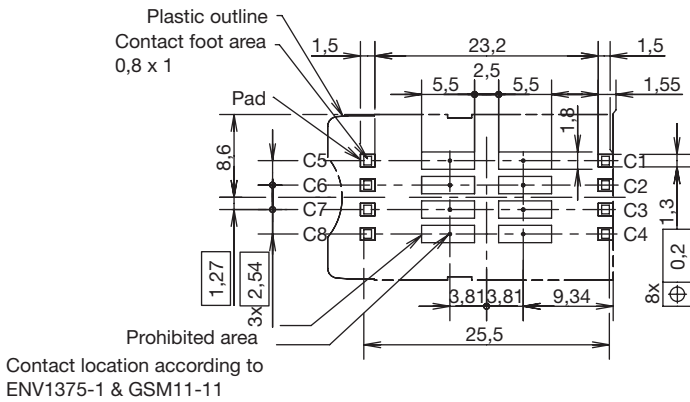

6 nov 18



Dimensions are shown in mm  
Specifications and dimensions subject to change


www.ckwitches.com




# CCM03 MK2 Series

CCM03-3012 LFT

SIM/SAM

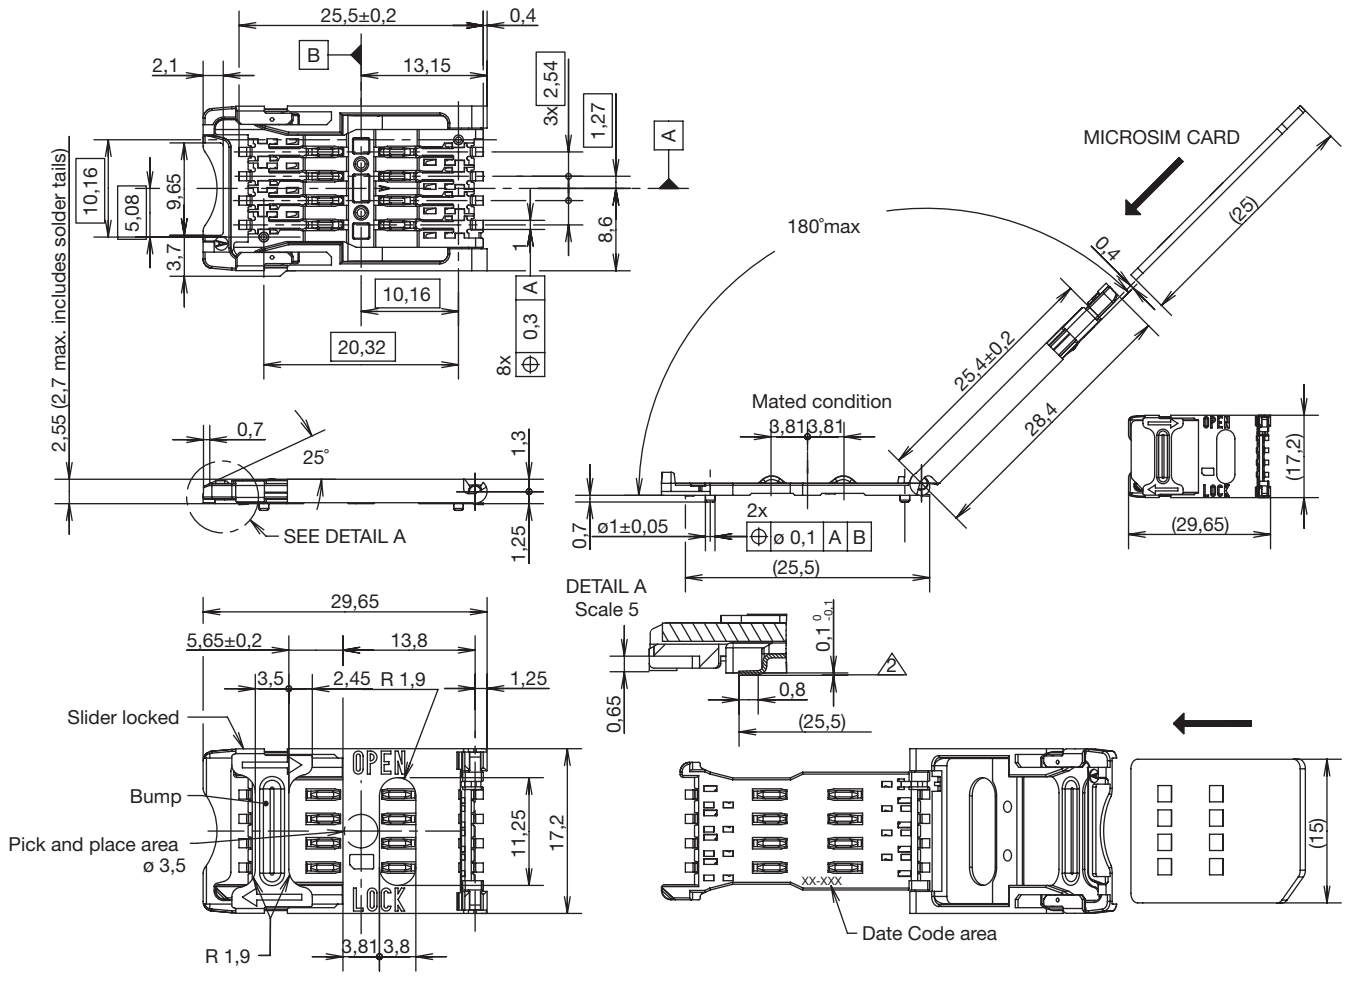

RECOMMENDED PC BOARD LAYOUT  
(Component side)

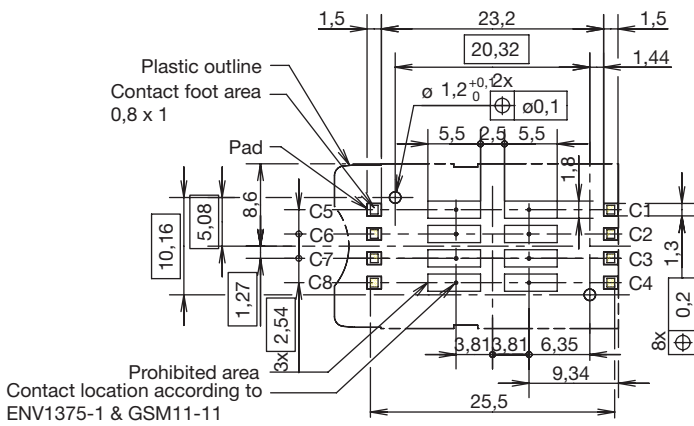

Dimensions are shown in mm  
Specifications and dimensions subject to change


www.ckwitches.com



6 nov 18

# CCM03 MK2 Series


## CCM03-3013 LFT & CCM03-3013 TP LFT

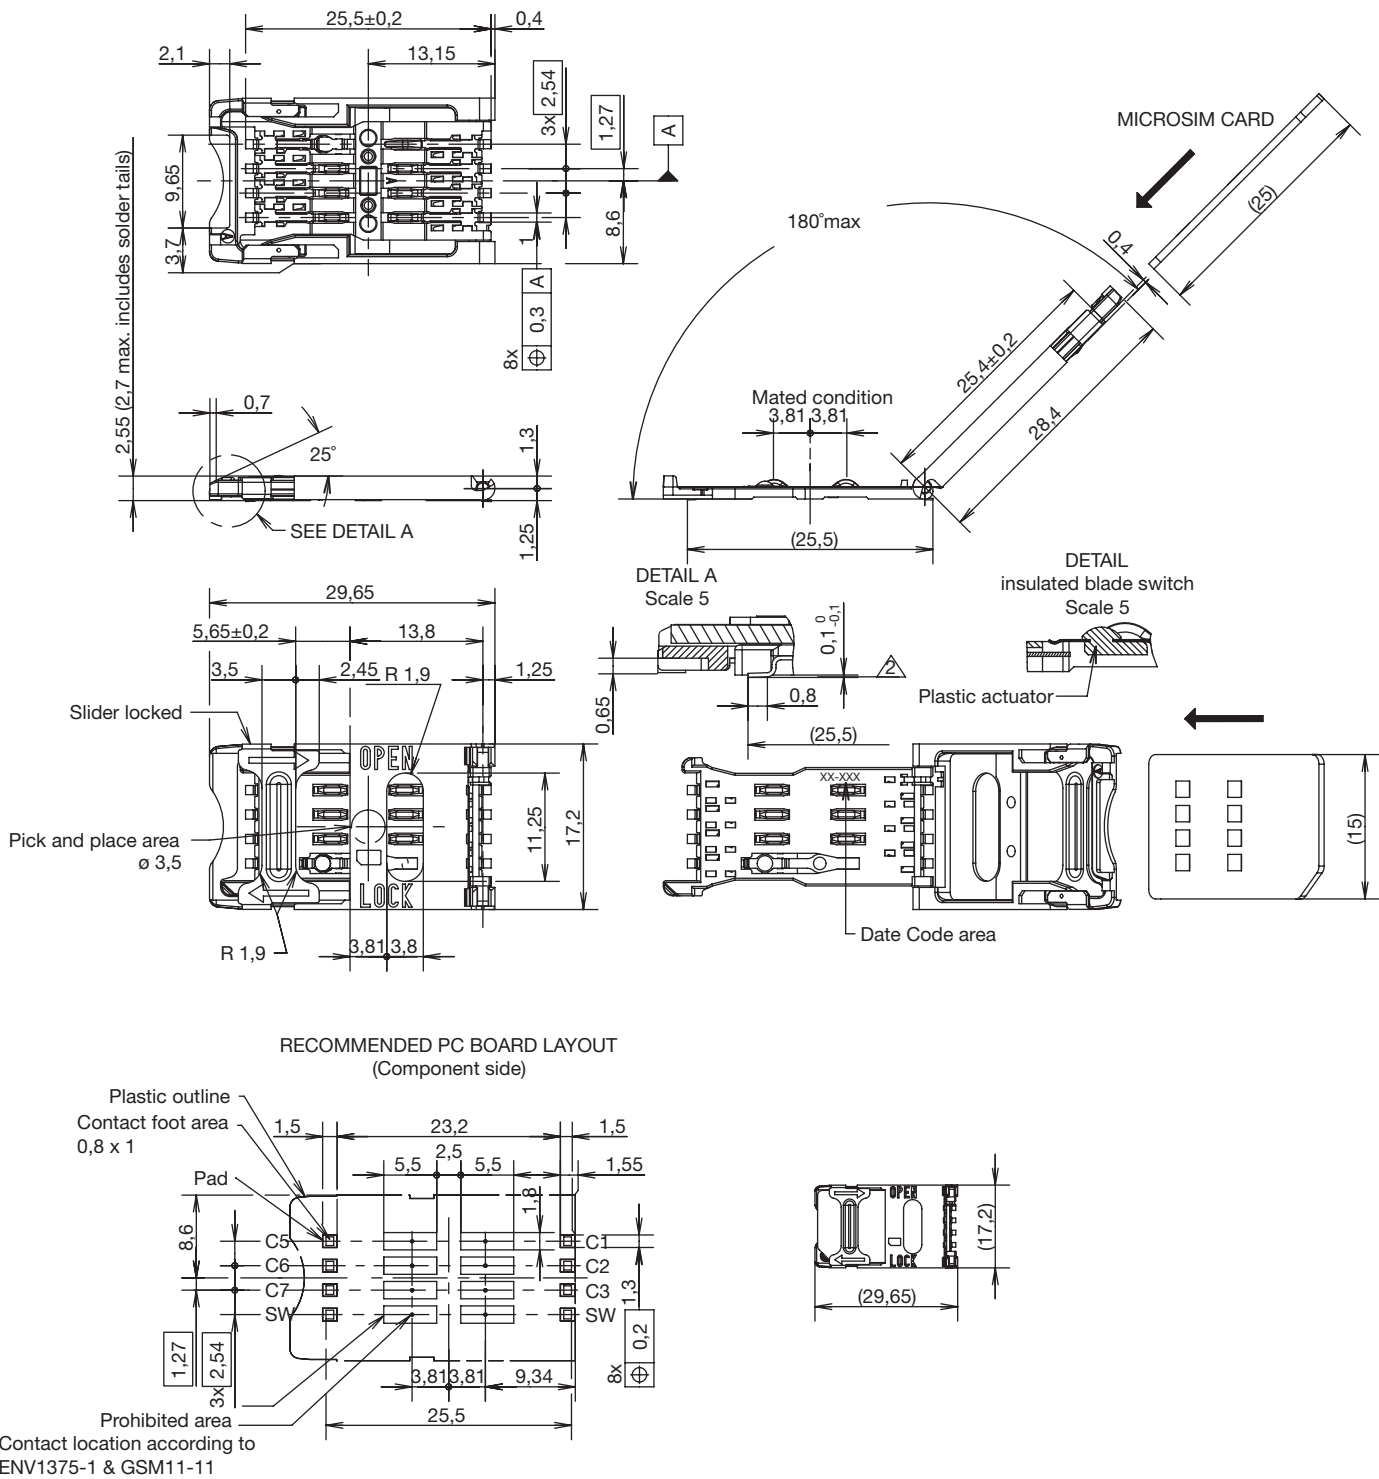

SIM/SAM




6 nov 18

 First Angle Projection  
 Dimensions are shown in mm  
 Specifications and dimensions subject to change  
[www.ckwitches.com](http://www.ckwitches.com)

# CCM03 MK2 Series

CCM03-3512 LFT

SIM/SAM

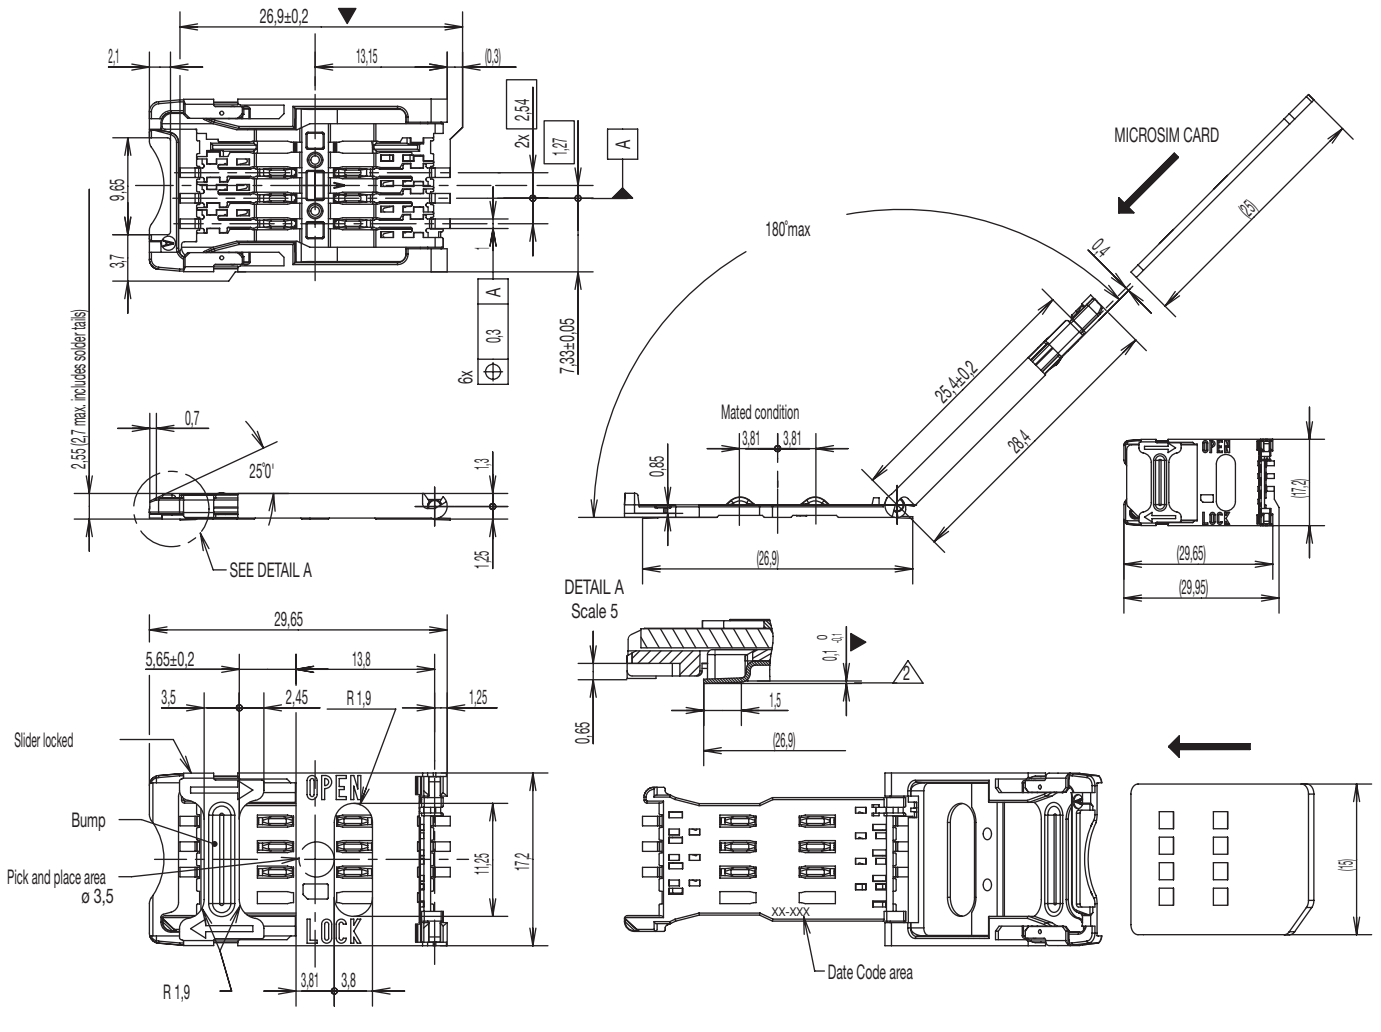


6 nov 18




Dimensions are shown in mm  
Specifications and dimensions subject to change

www.ckswitches.com

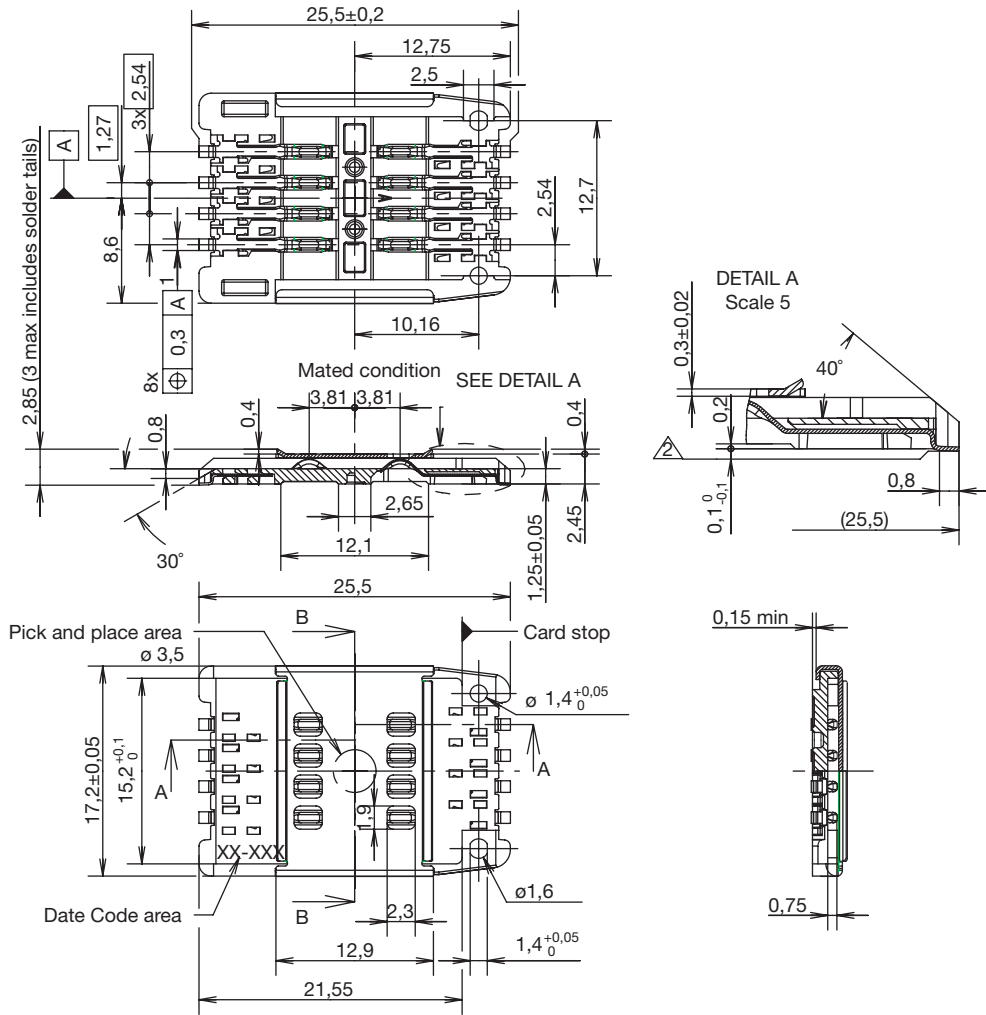

RECOMMENDED PC BOARD LAYOUT  
(Component side)

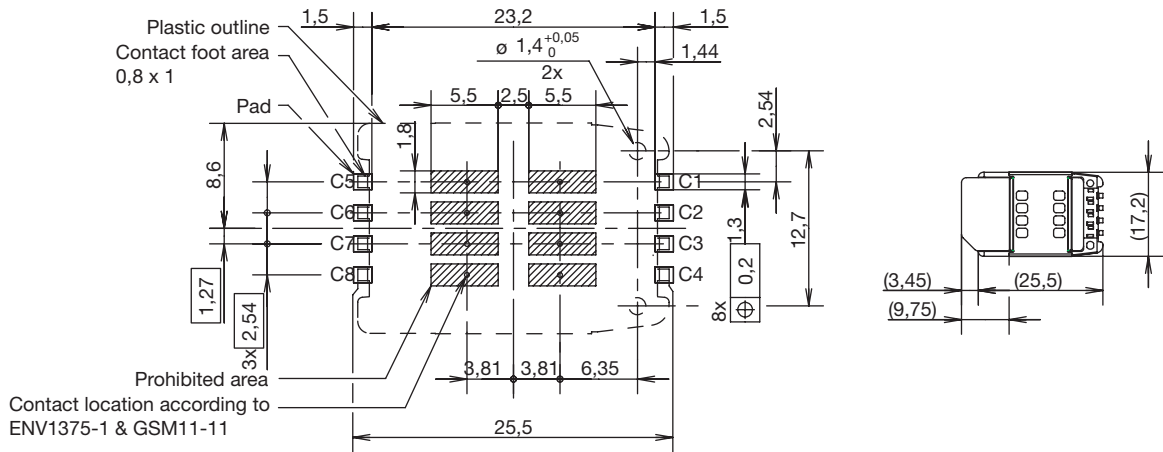


First Angle  
Projection

Dimensions are shown in mm  
Specifications and dimensions subject to change


www.ckswitches.com

# CCM03 MK2 Series

## CCM03-3754 LFT

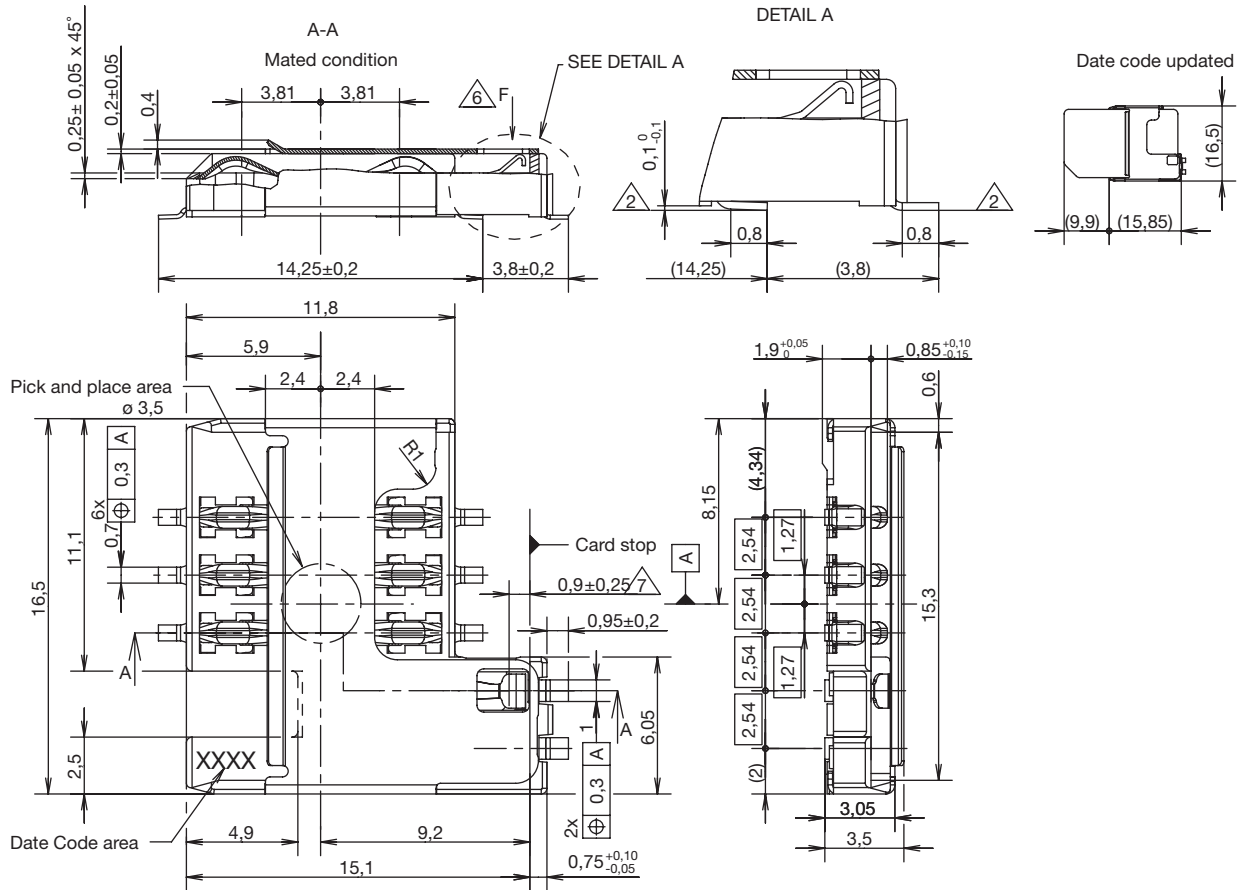

RECOMMENDED PC BOARD LAYOUT  
(Component side)

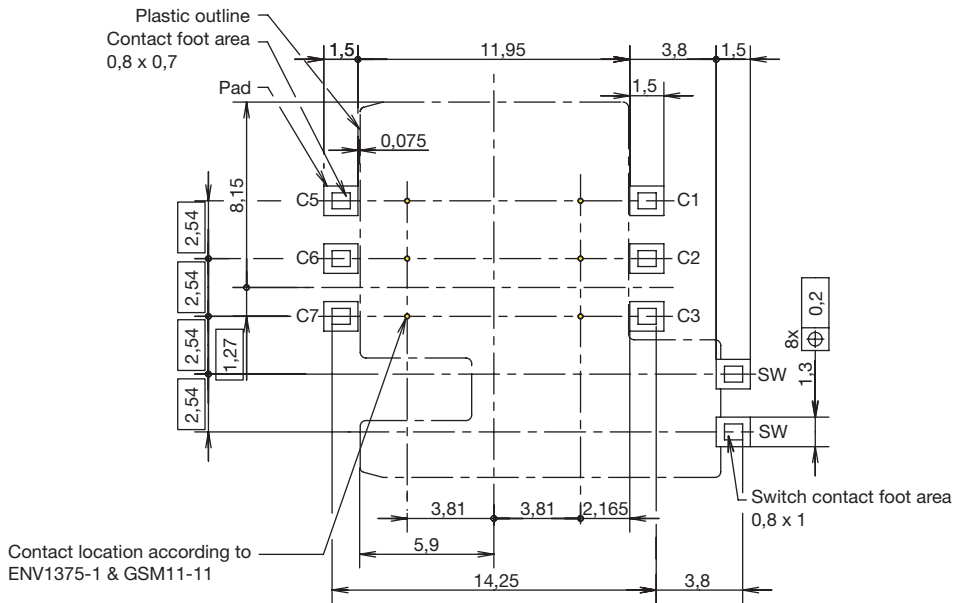

Dimensions are shown in mm  
Specifications and dimensions subject to change

www.ckwitches.com

SIM/SAM




6 nov 18




# CCM03 MK2 Series


## CCM03-3760 LFT

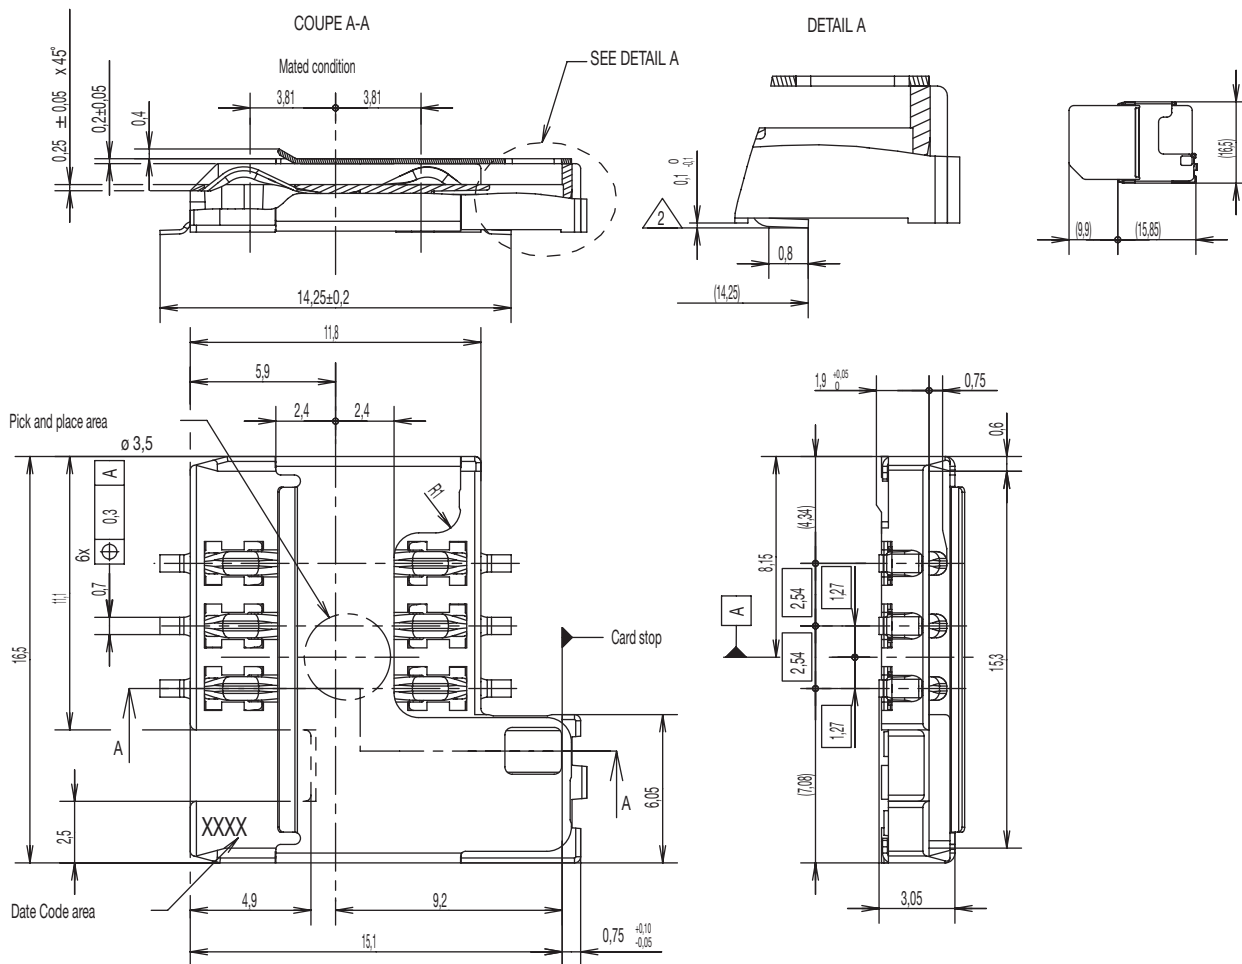

### RECOMMENDED PC BOARD LAYOUT (Component side)

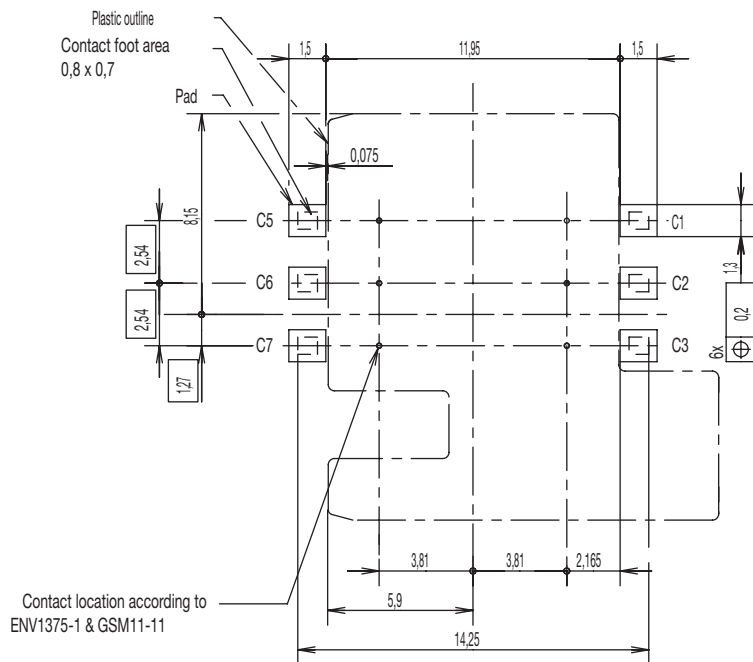

6 nov 18




Dimensions are shown in mm  
 Specifications and dimensions subject to change

www.ckswitches.com


SIM/SAM

# CCM03 MK2 Series

CCM03-3764 LFT

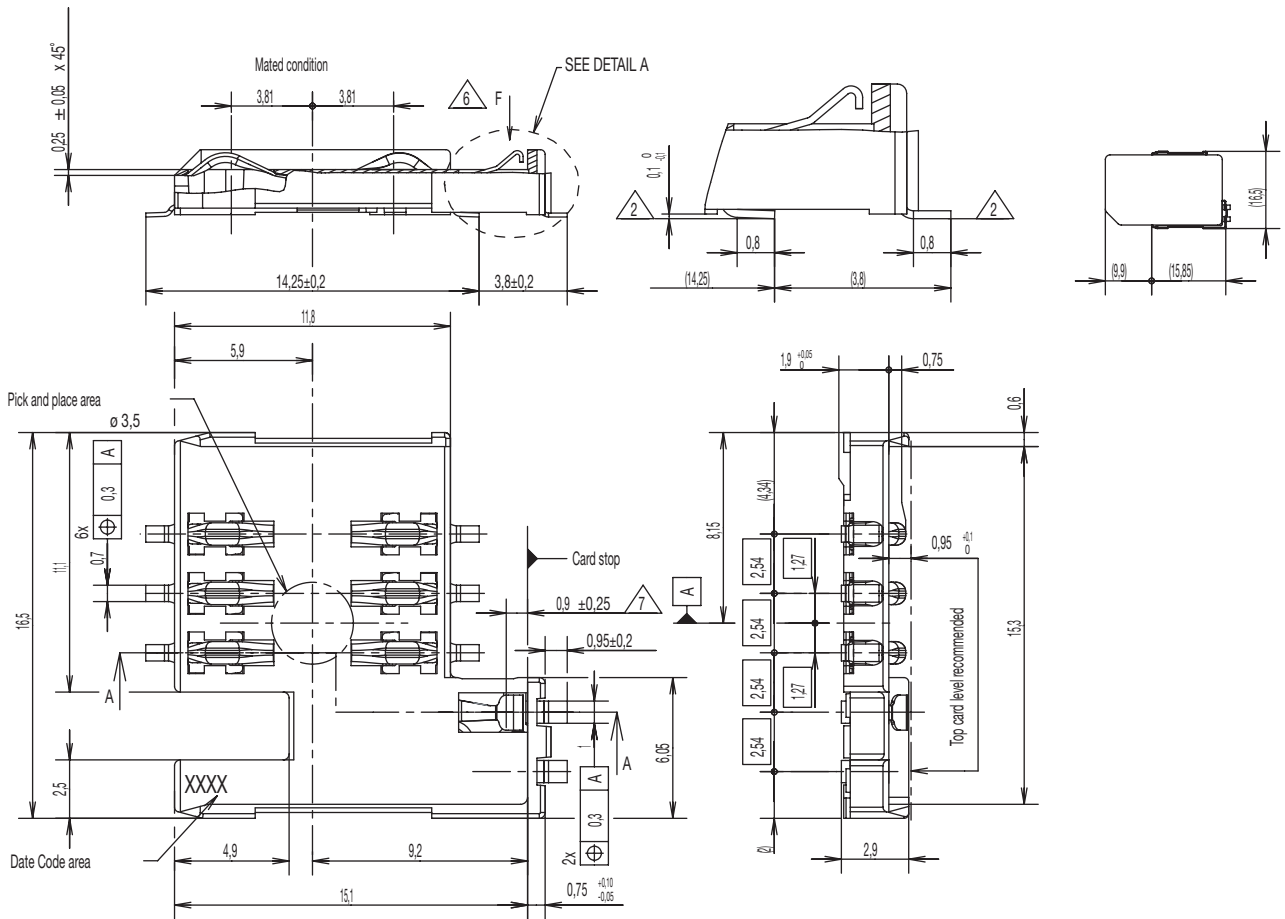

RECOMMENDED PC BOARD LAYOUT  
(Component side)

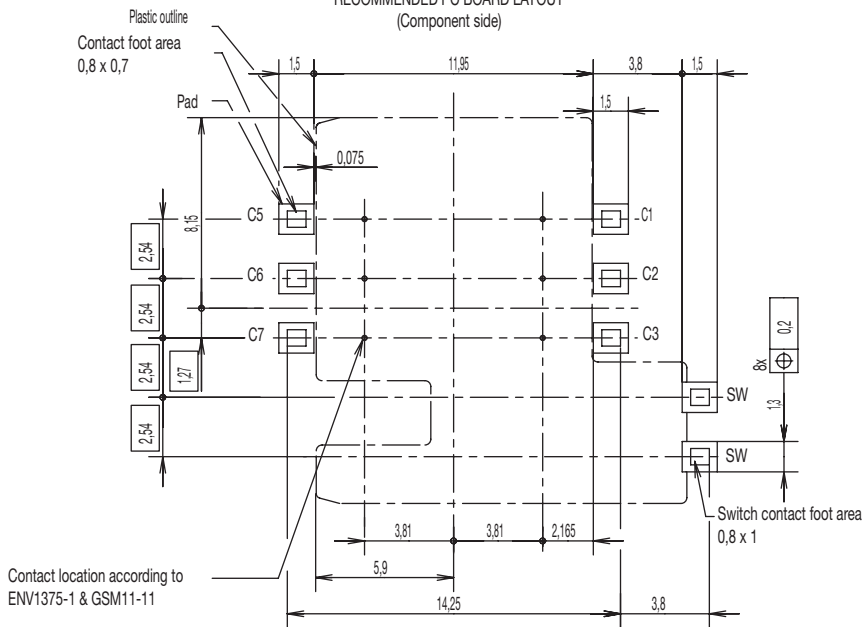

Contact location according to  
ENV1375-1 & GSM11-11



Dimensions are shown in mm  
Specifications and dimensions subject to change

www.ckswitches.com

SIM/SAM



6 nov 18

# Drawing Index

Designation	Page	Designation	Page
CCM01-2027LFT	11	CCM04-5427LFT	20
CCM01-6202LFT	8	CCM04-5436LFT	21
CCM01-6101LFT	9	CCM04-5468LFT	22
		CCM04-5454LFT	23
CCM02-2503LFT	14	CCM04-5455LFT	24
CCM02-2504LFT	15	CCM04-5452LFT	25
CCM02-F503LFT	14	CCM04-5202LFT	26
CCM02-F504LFT	15		
CCM02-F796LFT	16	CCM04-5120LFS	44
CCM02-F794LFT	17	CCM04-4118LFS	45
CCM02-F844LFT	18	CCM04-5137LFS	46
		CCM04-5149LFS	47
CCM03-3001LFT	29	CCM04-4151LFS	48
CCM03-3002LFT	30		
CCM03-3003LFT	31		
CCM03-3004LFT	32		
CCM03-3009LFT	29		
CCM03-3010LFT	30		
CCM03-3011LFT	33		
CCM03-3012LFT	34		
CCM03-3013LFT	35		
CCM03-3512LFT	36		
CCM03-3519LFT	37		
CCM03-3504LFT	38		
CCM03-3505LFT	38		
CCM03-3535LFT	39		
CCM03-3754LFT	40		
CCM03-3760LFT	41		
CCM03-3764LFT	42		